

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

From the INTERNATIONAL BUREAU

To:

Assistant Commissioner for Patents
United States Patent and Trademark
Office
Box PCT
Washington, D.C. 20231
ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

Date of mailing (day/month/year) 25 February 2000 (25.02.00)	
International application No. PCT/IT99/00178	Applicant's or agent's file reference PCT24072
International filing date (day/month/year) 18 June 1999 (18.06.99)	Priority date (day/month/year) 13 July 1998 (13.07.98)
Applicant ARDEMAGNI, Fiorenzo	

1. The designated Office is hereby notified of its election made:

☒ in the demand filed with the International Preliminary Examining Authority on:

11 January 2000 (11.01.00)

☐ in a notice effecting later election filed with the International Bureau on:2. The election ☒ was☐ was not

made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Olivia RANAIVOJAONA

Telephone No.: (41-22) 338.83.38

THIS PAGE BLANK (USPTO)

PATENT COOPERATION TREATY

PCT

NOTIFICATION OF THE RECORDING OF A CHANGE

(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

BANCHETTI, Marina
Ing. Barzanò & Zanardo Roma S.p.A.
Via Piemonte, 26
I-00187 Roma
ITALIE

SP
2600
2611

Date of mailing (day/month/year)
11 January 2001 (11.01.01)

Applicant's or agent's file reference
PCT24072

International application No.
PCT/IT99/00178

IMPORTANT NOTIFICATION

International filing date (day/month/year)
18 June 1999 (18.06.99)

1. The following indications appeared on record concerning:

☒ the applicant ☐ the inventor ☐ the agent ☐ the common representative

Name and Address
CHEPA VERWALTUNGS S.A.
Via degli Amadio 1
Lugano
Switzerland

State of Nationality

CH

State of Residence

CH

Telephone No.

Facsimile No.

Teleprinter No.

2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:

☒ the person ☐ the name ☐ the address ☐ the nationality ☐ the residence

Name and Address
UNI.COM S.P.A.
Via Kennedy, 141
I-81031 Aversa (CE)
Italy

State of Nationality

IT

State of Residence

IT

Telephone No.

Facsimile No.

Teleprinter No.

3. Further observations, if necessary:

4. A copy of this notification has been sent to:

☒ the receiving Office ☐ the designated Offices concerned
☐ the International Searching Authority ☒ the elected Offices concerned
☐ the International Preliminary Examining Authority ☐ other:

The International Bureau of WIPO
34, chemin des Colombettes
1211 Geneva 20, Switzerland

Facsimile No.: (41-22) 740.14.35

Authorized officer

Elisabeth KÖNIG

Telephone No.: (41-22) 338.83.38

THIS PAGE BLANK (USPTO)

TENT COOPERATION TRE Y

PCT

NOTIFICATION OF THE RECORDING
OF A CHANGE(PCT Rule 92bis.1 and
Administrative Instructions, Section 422)

From the INTERNATIONAL BUREAU

To:

BANCHETTI, Marina
Ing. Barzanò & Zanardo Roma S.p.A.
Via Piemonte, 26
I-00187 Roma
ITALIE

Date of mailing (day/month/year) 02 March 2000 (02.03.00)	IMPORTANT NOTIFICATION
Applicant's or agent's file reference PCT24072	
International application No. PCT/IT99/00178	International filing date (day/month/year) 18 June 1999 (18.06.99)

1. The following indications appeared on record concerning:		
<input checked="" type="checkbox"/> the applicant	<input type="checkbox"/> the inventor	<input type="checkbox"/> the agent
<input type="checkbox"/> the common representative		
Name and Address PINNACLE VENTURES LTD. 3 Burlinton Road Dublin 4 Ireland	State of Nationality IE	State of Residence IE
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	
2. The International Bureau hereby notifies the applicant that the following change has been recorded concerning:		
<input checked="" type="checkbox"/> the person	<input type="checkbox"/> the name	<input type="checkbox"/> the address
<input type="checkbox"/> the nationality		
<input type="checkbox"/> the residence		
Name and Address CHEPA VERWALTUNGS S.A. Via degli Amadio 1 Lugano Switzerland	State of Nationality CH	State of Residence CH
	Telephone No.	
	Facsimile No.	
	Teleprinter No.	
3. Further observations, if necessary:		
4. A copy of this notification has been sent to:		
<input checked="" type="checkbox"/> the receiving Office	<input type="checkbox"/> the designated Offices concerned	
<input type="checkbox"/> the International Searching Authority	<input checked="" type="checkbox"/> the elected Offices concerned	
<input checked="" type="checkbox"/> the International Preliminary Examining Authority	<input type="checkbox"/> other:	

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland	Authorized officer F. Gateau
Facsimile No.: (41-22) 740.14.35	Telephone No.: (41-22) 338.83.38

THIS PAGE BLANK (USPTO)

PCT

**NOTICE INFORMING THE APPLICANT OF THE
COMMUNICATION OF THE INTERNATIONAL
APPLICATION TO THE DESIGNATED OFFICES**

(PCT Rule 47.1(c), first sentence)

From the INTERNATIONAL BUREAU

To:

BANCHETTI, Marina
Ing. Barzanò & Zanardo Roma S.p.A.
Via Piemonte, 26
I-00187 Roma
ITALIE

Vicenti

Date of mailing (day/month/year) 20 January 2000 (20.01.00)		
Applicant's or agent's file reference PCT24072		IMPORTANT NOTICE
International application No. PCT/IT99/00178	International filing date (day/month/year) 18 June 1999 (18.06.99)	Priority date (day/month/year) 13 July 1998 (13.07.98)
Applicant PINNACLE VENTURES LTD. et al		

1. Notice is hereby given that the International Bureau has communicated, as provided in Article 20, the international application to the following designated Offices on the date indicated above as the date of mailing of this Notice:

AU,CN,EP,IL,JP,KP,KR,US

In accordance with Rule 47.1(c), third sentence, those Offices will accept the present Notice as conclusive evidence that the communication of the international application has duly taken place on the date of mailing indicated above and no copy of the international application is required to be furnished by the applicant to the designated Office(s).

2. The following designated Offices have waived the requirement for such a communication at this time:

**AE,AL,AM,AP,AT,AZ,BA,BB,BG,BR,BY,CA,CH,CU,CZ,DE,DK,EA,EE,ES,FI,GB,GD,GE,GH,GM,HR,
HU,ID,IN,IS,KE,KG,KZ,LC,LK,LR,LS,LT,LU,LV,MD,MG,MK,MN,MW,MX,NO,NZ,OA,PL,PT,RO,RU,
SD,SE,SG,SI,SK,SL,TJ,TM,TR,TT,UA,UG,UZ,VN,YU,ZA,ZW**

The communication will be made to those Offices only upon their request. Furthermore, those Offices do not require the applicant to furnish a copy of the international application (Rule 49.1(a-bis)).

3. Enclosed with this Notice is a copy of the international application as published by the International Bureau on 20 January 2000 (20.01.00) under No. WO 00/03542

REMINDER REGARDING CHAPTER II (Article 31(2)(a) and Rule 54.2)

If the applicant wishes to postpone entry into the national phase until 30 months (or later in some Offices) from the priority date, a demand for international preliminary examination must be filed with the competent International Preliminary Examining Authority before the expiration of 19 months from the priority date.

It is the applicant's sole responsibility to monitor the 19-month time limit.

Note that only an applicant who is a national or resident of a PCT Contracting State which is bound by Chapter II has the right to file a demand for international preliminary examination.

REMINDER REGARDING ENTRY INTO THE NATIONAL PHASE (Article 22 or 39(1))

If the applicant wishes to proceed with the international application in the national phase, he must, within 20 months or 30 months, or later in some Offices, perform the acts referred to therein before each designated or elected Office.

For further important information on the time limits and acts to be performed for entering the national phase, see the Annex to Form PCT/IB/301 (Notification of Receipt of Record Copy) and Volume II of the PCT Applicant's Guide.

<p align="center">The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland</p> <p>Facsimile No. (41-22) 740.14.35</p>	<p>Authorized officer J. Zahra</p> <p>Telephone No. (41-22) 338.83.38</p>
--	--

THIS PAGE BLANK (USPTO)

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference PCT24072	FOR FURTHER ACTION see Notification of Transmittal of International Search Report (Form PCT/ISA/220) as well as, where applicable, item 5 below.	
International application No. PCT/IT 99/00178	International filing date (day/month/year) 18/06/1999	(Earliest) Priority Date (day/month/year) 13/07/1998
Applicant PINNACLE VENTURES LTD. et al.		

This International Search Report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau.

This International Search Report consists of a total of 3 sheets.



It is also accompanied by a copy of each prior art document cited in this report.

1. Basis of the report

- a. With regard to the **language**, the international search was carried out on the basis of the international application in the language in which it was filed, unless otherwise indicated under this item.



the international search was carried out on the basis of a translation of the international application furnished to this Authority (Rule 23.1(b)).

- b. With regard to any **nucleotide and/or amino acid sequence** disclosed in the international application, the international search was carried out on the basis of the sequence listing:



contained in the international application in written form.



filed together with the international application in computer readable form.



furnished subsequently to this Authority in written form.



furnished subsequently to this Authority in computer readable form.



the statement that the subsequently furnished written sequence listing does not go beyond the disclosure in the international application as filed has been furnished.



the statement that the information recorded in computer readable form is identical to the written sequence listing has been furnished

2. ☐ **Certain claims were found unsearchable** (See Box I).

3. ☐ **Unity of invention is lacking** (see Box II).

4. With regard to the **title**,



the text is approved as submitted by the applicant.



the text has been established by this Authority to read as follows:

5. With regard to the **abstract**,



the text is approved as submitted by the applicant.



the text has been established, according to Rule 38.2(b), by this Authority as it appears in Box III. The applicant may, within one month from the date of mailing of this international search report, submit comments to this Authority.

6. The figure of the **drawings** to be published with the abstract is Figure No.



as suggested by the applicant.



because the applicant failed to suggest a figure.



because this figure better characterizes the invention.

1



None of the figures.

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

CT/IT 99/00178

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHEDMinimum documentation searched (classification system followed by classification symbols)
IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 24989 A (ADC TELECOMMUNICATIONS INC) 15 August 1996 (1996-08-15) abstract page 15, line 27 -page 20, line 30; figures 1-6 ---	1
A	WO 97 01236 A (SCIENTIFIC ATLANTA) 9 January 1997 (1997-01-09) page 3, paragraph 2 -page 7, paragraph 2; figures 2,3 ---	1
A	EP 0 779 740 A (FLUIT JACOBUS PETRUS V D) 18 June 1997 (1997-06-18) column 1, line 1 -column 4, line 17; figures 1-3 --- -/--	1

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 September 1999

Date of mailing of the international search report

05/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fuchs, P

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

CT/IT 99/00178

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 756 393 A (THOMSON BROADCAST SYSTEMS) 29 January 1997 (1997-01-29) abstract; figures 5,7 -----	1

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 99/00178

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9624989	A	15-08-1996	AU 703284 B	25-03-1999
			AU 4915896 A	27-08-1996
			AU 694620 B	23-07-1998
			AU 4916296 A	27-08-1996
			AU 703879 B	01-04-1999
			AU 8713698 A	03-12-1998
			AU 703639 B	25-03-1999
			AU 8713798 A	03-12-1998
			AU 704758 B	06-05-1999
			AU 8714198 A	19-11-1998
			AU 703459 B	25-03-1999
			AU 8714298 A	10-12-1998
			AU 703463 B	25-03-1999
			AU 8714398 A	26-11-1998
			BR 9607031 A	04-11-1997
			CA 2211117 A	15-08-1996
			CA 2211803 A	15-08-1996
			CN 1193433 A	16-09-1998
			CZ 9702487 A	17-12-1997
			EP 0809898 A	03-12-1997
			EP 0808534 A	26-11-1997
			FI 973134 A	06-10-1997
			JP 10507051 T	07-07-1998
			JP 10513622 T	22-12-1998
			NZ 302973 A	26-08-1998
			WO 9624995 A	15-08-1996

WO 9701236	A	09-01-1997	AU 6386896 A	22-01-1997
			CA 2222603 A	09-01-1997
			EP 0873638 A	28-10-1998

EP 0779740	A	18-06-1997	NL 1001909 C	17-06-1997

EP 0756393	A	29-01-1997	FR 2737365 A	31-01-1997
			JP 9130350 A	16-05-1997

THIS PAGE BLANK (USPTO)




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : H04N 7/173	A1	(11) International Publication Number: WO 00/03542 (43) International Publication Date: 20 January 2000 (20.01.00)
(21) International Application Number: PCT/IT99/00178 (22) International Filing Date: 18 June 1999 (18.06.99) (30) Priority Data: RM98A000469 13 July 1998 (13.07.98) IT (71) Applicant (for all designated States except US): PINNACLE VENTURES LTD. [IE/IE]; 3 Burlington Road, Dublin 4 (IE). (72) Inventor; and (75) Inventor/Applicant (for US only): ARDEMAGNI, Fiorenzo [IT/IT]; Via di Marco Simone, 82, I-00012 Guidonia (IT). (74) Agents: BANCHETTI, Marina et al.; Ing. Barzanò & Zanardo Roma S.p.A., Via Piemonte, 26, I-00187 Roma (IT).		(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>In English translation (filed in Italian).</i>

(54) Title: OPTIMIZED SYSTEM FOR DISTRIBUTING TELEVISION AND TELECOMMUNICATION SERVICES FROM A PERIPHERAL NODE TO USER TERMINALS

(57) Abstract

The invention relates to an optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12) comprising a bi-directional switch exchange (1) connected to said peripheral node, a facility (7) for bi-directional distribution of signals connected to said exchange (1) and at least one user apparatus (9) connected to said user terminals (10, 11, 12), said exchange (1) receiving from said peripheral node the signals belonging to said television and telecommunication services and from said bi-directional distribution facility (7) a local upstream data sequence including the television channel selection signals, said exchange (1) selecting some input signals belonging to television services and reallocating and/or frequency transmodulating them in order to transmit them, in combination with a local downstream data sequence, to said signal bi-directional distribution facility (7), said user apparatus (9) processing said local downstream data sequence and generating said local upstream data sequence to be transmitted to said exchange (1) together with the upstream data and/or voice channels related to said telecommunication services.

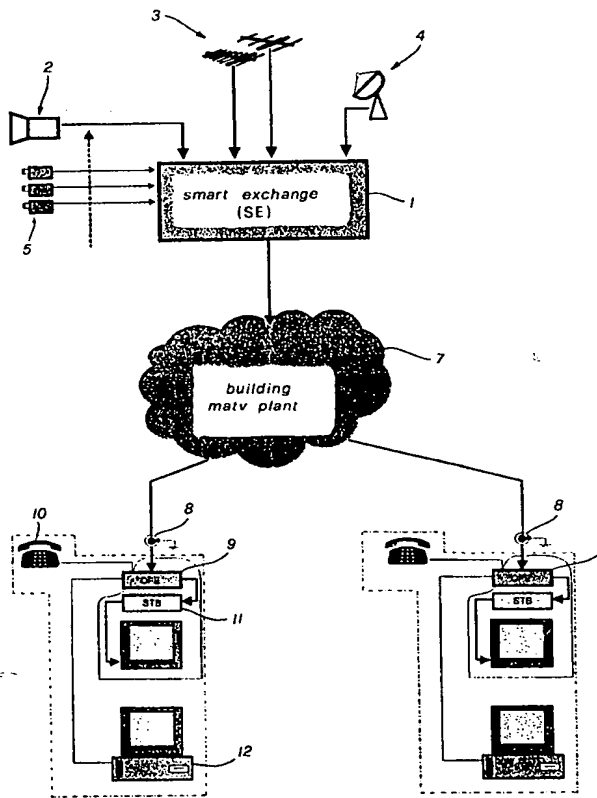

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

OPTIMIZED SYSTEM FOR DISTRIBUTING TELEVISION AND TELECOMMUNICATION SERVICES FROM A PERIPHERAL NODE TO USER TERMINALS

5 This invention relates to an optimized system for distributing television and telecommunication services from a peripheral node to user terminals.

10 More particularly, this invention relates to a system of the above mentioned kind that enables the already existing facilities designed for centralized distribution of land based television channels, also known as Master Antenna TV (MATV) to also be adapted, in economically convenient and reliable way, to simultaneously distribute other television and telecommunication services, also including the interactive services.

15 It is known that, in Italy as well as in many other countries, hybrid telecommunication networks based upon coaxial cables and fibers, also known as HFC (Hybrid Fiber-Coax) networks, are being presently developed and largely utilized, to distribute many services, particularly multi-medial services of interactive type.

20 Such HFC networks are based upon peripheral nodes to distribute the signals to the individual user terminals connected thereto. This is the case, for instance, of a building node connected by means of suitable cables to the network in order to distribute the signals to the users arranged throughout the building itself. In this respect, some building nodes can be connected to the network, at least in so far the television services are concerned, by means of a Microwave Video
25 Distribution Service, namely by means of so-called MVDS radio links.

The interactive telecommunication services include data and/or voice return or upstream channels from the individual user terminals to the concerned peripheral node, such as a building node, connected to them and subsequently to the network.

30 Reference will be particularly made hereinafter to building nodes considered as peripheral nodes, but it should be understood that the system according to this invention can be applied to any peripheral node.

35 The architectures of the facilities designed to distribute the various services from a building node to the individual user terminals

connected thereto are based upon the concept that all capabilities that each services is adapted to provide be available to each one of said terminals. In particular, in the case of television services, such as the distribution of band-based television channels by means of MATV facilities, the distribution of satellite-based television channels by means of SMATV facilities (Satellite MATV) and the distribution cable or wire pay television or CATV (Community Antenna TV), this means that all television channels accessible to the users should be available on their terminals, with consequent extended band exploitation.

10 All presently existing MATV facilities are not sufficient to fulfill the above outlined integral availability of the concerned services on each user terminal and this entails that a coaxial facility is to be provided between the building node and the assembly of the user terminals for each additional television and/or telecommunication service.

15 This results into a number of drawbacks.

First of all, such facilities are generally plugged in different sockets within the apartments.

Furthermore, the differences between the equipment entail noticeable difficulties in the maintenance intervenes.

20 Lastly, since the above mentioned facilities are generally installed in different times, there are noticeable disadvantages for the users.

Some approaches have already been developed to eliminate the above mentioned drawbacks.

25 The most largely adopted approach provides for realizing a single plant structure having a very extended pass band, with possible frequency translation of some signals in order to allow signals allocated to at least partially overlapping band to co-exist.

Anyway also this approach has some drawbacks.

30 In the first place, the MATV plant generally provided within the building is not utilized.

Besides that, the capabilities each service is adapted to furnish should be limited; in particular, the number of available channels for some television services should be reduced.

Lastly, such approaches do not allow to enlarge the number and the typologies of the television and/or telecommunication services that could be possibly made available after the system facilities have been firstly sized.

5 It is an object of this invention, therefore, to enable in simple, economically convenient and reliable way to utilize a single plant for distributing the concerned signals, preferably a conventional, possibly already installed MATV plant, between the peripheral node and the user terminals connected thereto, for contemporaneous distribution of land
10 based television channels as well as other television and/or telecommunication services, also including any interactive services.

 Specific subject matter of this invention is an optimized system for distribution of television and telecommunication services from a peripheral node to user terminals, said television services including land
15 based radio frequency broadcast television channels, satellite based radio frequency broadcast television channels and HFC network or cable based broadcast television channels, each of said telecommunication services including a downstream data and/or voice channel and an upstream data and/or voice channel, said system also including a bi-
20 directional switch exchange connected to said peripheral node, a facility for bi-directional distribution of signals connected to said exchange and at least a user apparatus connected to said bi-directional facility as well as to said user terminals, said exchange comprising a filter, a frequency filtering and translating unit, a logic control unit, a combiner and a
25 selector, said combiner and selector being connected to said bi-directional distribution facility, the signals belonging to said land based television channels being applied to the input of said combiner, said filter receiving the signals belonging to said cable based television channels and to said downstream data and/or voice channels, said filter separating
30 the signals belonging to said downstream data and/or voice channels from the signals belonging to said cable based television channels, said filter also reallocating the signals belonging to said downstream data and/or voice channels to pre-established frequencies and applying them to the input of said combiner, said filter also applying the signals belonging to
35 said cable based television channels to said frequency filtering and translating unit, the signals belonging to said satellite based television channels being also applied to said frequency filtering and translating

unit, said selector being connected to said bi-directional distribution facility in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit and to receive the signals belonging to said upstream data and/or voice channels therefrom and to apply them to said peripheral node, said control logic unit generating the control signals to be applied to said frequency filtering and translating unit and a local downstream data sequence to be applied to the input of said combiner, said frequency filtering and translating unit selecting the input signals and frequency reallocating and/or translating them for applying them to the input of said combiner, said combiner mixing the input signals and applying them to said bi-directional distribution facility, said user apparatus including a demodulator, a logic unit, a modulator and a combiner, said logic unit processing said local downstream data sequence outcoming from said demodulator, said modulator modulating a local upstream data sequence related to said user apparatus, said combiner mixing the signals belonging to said local upstream data sequence as well as the signals belonging to upstream data and /or voice channels related to said user apparatus and applying them to said bi-directional distribution facility.

According to this invention, said exchange further comprises, upstream of said combiner, a unit for filtering the signals belonging to said land based television channels, which eliminates all replicated signals having the worst signal-to-noise ratio (SNR).

Still according to this invention, said television services further comprise television channels related to closed circuit television systems (CCTV) that are coupled to the input of said combiner or to said frequency filtering and translating unit.

Further according to this invention, said frequency filtering and translating unit comprises a converter unit for conversion of HFC radio frequencies, a converter unit for conversion of satellite based radio frequencies as well as a switch unit, said converter units having N inputs and N outputs, said switch unit having $2 \cdot N$ inputs and N outputs, the homologous outputs of both said converter units being alternatively selected by said switch unit and transferred to said frequency filtering and translating unit.

Still according to this invention, said HFC radio frequency converter unit comprises N converter-filters, each of which comprises a tuner having a constant amplitude pass band and tuneable central frequency, a mixer, a selectable frequency local oscillator, a band pass filter having a constant amplitude pass band and a tuneable central frequency, as well as a logic unit, said tuner filtering said input signal, said mixer, said local oscillator and said pass band filter translating the frequency of the filtered signal and said logic unit generating the control signals.

Further according to this invention, said satellite based radio frequency converter unit comprises N converter-filters, each of which comprises a tuner having a constant amplitude pass band and tuneable central frequency, a mixer, a selectable frequency local oscillator, a band pass filter having a constant amplitude pass band and a tuneable central frequency, as well as a logic unit, said tuner filtering said input signal, said mixer, said local oscillator and said pass band filter translating the frequency of the filtered signal and said logic unit generating the control signals.

Preferably, each of said N converter-filters comprised in said satellite based radio frequency converter unit further comprises a transmodulator.

Still according to this invention, said satellite based radio frequency converter unit comprises N converter-filters, each of which comprises a transmodulator and a control logic unit, said transmodulator filtering, transmodulating and frequency translating the input signal.

Further according to this invention, said signal bi-directional distribution facility is an apparatus for centralized distribution of land based television channels or a Master Antenna TV (MATV) facility.

Again according to this invention, each user apparatus is connected to one or more telephone devices and/or to one or more Personal Computers or PCs and additionally it is connected to one or more communication apparatuses or Set-Top-Box (STB), with a pay television service provider.

Still according to this invention, the local upstream or local downstream data sequences are modulated by digital modulation,

preferably FSK and/or a PSK and/or QAM modulation and said user apparatus further comprises a digital demodulator arranged upstream of said logic unit, a frequency multiplexer and a TELCO demodulator for telecommunication services, arranged upstream of said user terminals, a
5 TELCO modulator for telecommunication services, arranged downstream of said user terminals, a digital modulator which receives the television channel selection data from at least one user terminal as well as a combiner arranged downstream of said TELCO modulator and of said digital modulator and upstream of said bi-directional distribution facility.

10 This invention will be now described by way of illustration not by way of limitation, according to its preferred embodiment, by particularly referring to the Figures of the enclosed drawing, in which:

Figure 1 is a schematic representation of the system according to this invention;

15 Figure 2 shows a schematic diagram illustrating the frequency distribution of the signal appearing upstream of the system of Figure 1;

Figure 3 is a schematic representation of the preferred embodiment of the bi-directional switch exchange of the system of Figure 1;

20 Figure 4a shows a block diagram of a first converter filter as utilized in the exchange of Figure 3;

Figure 4b shows a schematic diagram illustrating the frequency distribution of the signal appearing at the output of the converter filter of Figure 4a;

25 Figure 5a shows a block diagram of a second converter filter as utilized in the exchange of Figure 3;

Figure 5b shows a block diagram of a second embodiment of the second converter filter as utilized in the exchange of Figure 3;

30 Figure 6 shows a schematic representation of the local downstream data channel as generated by exchange of Figure 3; and

Figure 7 shows a schematic representation of the user apparatus in the system of Figure 1.

By referring now to Figure 1, the system according to this invention comprises a bi-directional switch exchange 1, positioned at a

building node, which receives all signals belonging to the television and telecommunication services available in network HFC2, in system 3 which receives the land based television radio frequencies, in system 4 which receives the satellite based television radio frequencies as well as in local
5 apparatuses 5 of the building, such as, for instance, the Closed Circuit Television systems (CCTV) and the video intercommunication systems.

Exchange 1 is connected to the MATV plant 7 of the building which conveys the signal in bi-directional way between exchange 1 and the individual user sockets 8.

10 Each socket 8 is connected to a user apparatus 9 which conveys the various signals, in bi-directional way, between said socket 8 and the corresponding user terminals 10, 11 and 12. In particular, such terminals comprise a telephone set 10, a communication apparatus 11, known under the name Set-Top-Box or STB, with a pay television service
15 provider and a Personal Computer or PC 12.

As it will be detailedly described hereinafter, the system according to this invention allows to utilize a MATV plant or facility for conveying in bi-directional way the signals of all television and telecommunication services to the input of said exchange, thereby
20 supplying them to all active user terminals (10, 11, 12), by means of a selection operation, advanced up to the level of said exchange 1, among the specific non land based television channels as requested by active STB terminals 11. In particular, when a user selects a specific satellite or cable based television channel on his STB terminal 11, the selection
25 signal returns to the exchange 1 in order to redefine its switching pattern and to supply the concerned STB terminal 11 with only the selected television channel, rather than all available channels. When it is considered that STB terminal 11 could also receive signals belonging to more than one television services, it evidently appears that a reduction is
30 obtained in terms of occupation of the band of the transmission channel interposed between the building node and the individual socket 8.

In other words, even if at least three television services are present at each user socket 8 and each service offers a big number of channels, each active user STB terminal 11 will select a single television
35 channel.

In particular, aiming at making the system according to this invention compatible with the distribution of signals belonging to land based television channels to users not having connections with other television services and consequently are not provided with STB terminals 11, according to the preferred embodiment of this invention, all these signals are conveyed by the MATV facility 7, thereby eliminating the signals replicated with the worst Signal-to-Noise Ratio (SNR) at the most, and maintaining the selection at a level corresponding to the user television set.

Therefore, the optimum distribution system, in terms of band occupation, is the one that, considering all available not land based television channels, conveys at each instant all and exclusively signals belonging to television channels (and, by obvious extension, the data channels of telecommunication services), as selected at each particular time by the user terminals connected thereto.

This means that, even if hundreds television programs and data channels potentially amenable to be distributed are present at the input end of the concerned building node, in the assumption that the user terminals connected to the node are N, the channels that will engage the distribution facility 7 will be N. If N is estimated according to the well known formulas of the traffic theory, it will be possible to size the maximum capability of said facility 7 in terms of band width. Since the above mentioned number is not higher than a few tens, it appears to be evident that an installation of MATV type is sufficient to fulfil the requirement.

In this respect, the signals conveyed by said facility 7 from the exchange 1 to the various user apparatuses 9, by which the so-called "downstream" flow or channel is formed, comprise all signals belonging to land based television channels, coming from the receiver system 3 for the land based television radio frequencies, all signals belonging to downstream data and/or voice channels corresponding to telecommunication services, the signals belonging to satellite based and/or cable based television channels as selected by active user STB terminals 11 and lastly signals generated by exchange 1 for controlling said active STB terminals 11.

On the other hand, the signals conveyed by said facility 7 from the user apparatuses 9 to exchange 1, by which the so-called "upstream" flow or channel is formed, comprise the signals belonging to upstream data and/or voice channels corresponding to telecommunication services as well as all signals corresponding to the selections performed by active user STB terminals 11. Such selection signals included in said upstream channel are utilized by said exchange 1 to convey at each time only signals belonging to satellite based and/or cable based television channels corresponding to the selections performed by the active user STB terminals 11.

The frequency distribution of the signals appearing upstream the exchange 1 is schematically illustrated in Figure 2. In frequency band VHF I, as designated by reference numeral 13, three television channels can be present, with amplitude modulated, suppressed or vestigial side band (AM-USB), while seven AM-VSB television signals can be present in band VHF III. As a general rule, not all of these ten channels are effectively occupied by radio frequency broadcast television signals.

A greater number of radio frequency broadcast television channels are allocated to band IV and/or to band V, not shown, the frequencies of which are comprehensively variable in the range of 470 to 862 MHz.

Band 15 of frequencies variable in the range of 88 to 108 MHz can be jammed by frequency modulated (FM) radio broadcasts in air.

Therefore, exchange 1 is adapted to allocate signals belonging to satellite based and/or cable based television channels into frequency band 16 variable in the range of 110 to 170 MHz and into frequency band 17 variable in the range of 230 to 470 MHz, as selected by active STB terminals 11.

Furthermore, since the same television program is broadcast both in band IV and in band V also in multiple frequency ranges, it is possible to drive said exchange 1 so as to perform a filtering function on the signals appearing in such bands in order to suppress all replicated television signals having worst SNR, in such a way as to distribute the qualitatively best signal and to make further frequency ranges available for allocating the signals belonging to satellite based and/or cable based television channels.

In conclusion, a range of about 300 MHz in bands 16 and 17 with an additional range of 100 MHz recovered by filtration in bands IV and V are made available to exchange 1 for allocating signals belonging to satellite – and/or cable-based television channels. Since in the preferred embodiment of this invention, the band portion occupied taken up by each switched television channel is of 8 MHz, the concerned exchange 1 can allocate about 50 satellite based and/or cable based television channels and, therefore, it will be in a position to fulfil the demands of 50 active user STB terminals 11 without access conflicts to said exchange 1 being raised.

It will be apparent to those skilled in the art that such capabilities are more than sufficient to fulfil all service requirements of a building node.

By referring to Figure 3, an exchange 1 according to a preferred embodiment of the system provides for those signals belonging to land-based television channels coming from the receiver system 3, which comprises one or more antennas, to be conveyed to a filter unit 18, comprising two combiner filters that operate in bands VHF and UHF, respectively. Output VHF 19 and output UHF 20 of said unit 18 convey one only signal for each television channel, thereby eliminating any replicated signals having the worst SNR. In other words, the land based television channels are introduced into system 7 with no frequency variation so as to be received by all users connected according the usual presently adopted method. In this way, exchange 1 exclusively provides for passively filtering the spectrum so as not to repeat the same television program several times, as it often occurs at present, but it exclusively delivers the qualitatively best signal selected among the available ones. Such an operation becomes necessary in order to “clean” the electromagnetic spectrum to the maximum possible extent, so as to make it available for conveying other services on said MATV facility 7.

The multicarrier signal comprising the signals belonging to television channels and to downstream data and/or voice channels of telecommunication services available on HFC network 2 is conveyed to a receiver unit 21 which translates it to base band having a frequency variable in the range of 54 to 862 MHz, in the preferred embodiment. In particular, the signals belonging to television channels available on

network HFC 2 comprise Digital Video Broadcasting-Cable or DVB-C signals, each of which is formed by a pack t of 6-8 digital programs, which are compressed in MPEG-2 and multiplexed in order to form the so-called "transponder stream" which, in turn, modulates in 64QAM the VHF or VHF carrier. The downstream data and/or voice channels of telecommunication services comprise data outcoming from the Internet Provider or ISP as well as downstream channels corresponding to narrow band services, such as the conventional telephone services or Plain Old Telephone Services (POTS), the Integrated Service Digital Network (ISDN) Basic Rate Interface (BRI) as well as the downstream data corresponding to pay television services transmitted to STB terminals 11.

The base band multicarrier signal from the output of receiver 21 is conveyed to a filter 22 in order to separate the signals belonging to data and/or voice downstream channels, routed to output 23, from signals belonging to television channels routed to output 24. In particular, filter 22 allocates the signals belonging to data and/or voice downstream channels of telecommunication services to predetermined and fixed, namely not switched, frequency bands, distributed to all sockets 8.

The signals belonging to satellite based television channels which are outcoming from the receiver system 4 including one or more antennas, are conveyed to a proper receiver unit 25.

The signals appearing on output 24 of filter 22 and on output 26 of the satellite receiver 25 are coupled to the inputs of two N-output replicators or splitters 27 and 28, respectively, which form a replication or splitting unit 29.

The N outputs of splitters 27 and 28 are coupled to a frequency filtering and translating unit 30, comprising a unit 31 for HFC radio frequency conversion and a unit 32 for conversion of satellite radio frequencies.

Each of said units 31 and 32 includes N radio frequency converter-filters that filter the input signal so as to allow only the signal belonging to a television channel to pass, by translating it from the original radio frequency range, HFC or satellite, respectively, to one of the frequency ranges free or available for the allocation functions performed by said exchange 1.

The above mentioned number N is preferably equal to the maximum number of switched television channels that can be allocated by said exchange 1 and, as above said, it is sufficient to fulfil the maximum demands from the concerned users, thereby absolutely preventing any conflicts from arising, with possible consequence that demands of some users remain unfulfilled.

By referring to Figure 4a, each radio frequency filter-converter HFC is provided with a constant amplitude pass band and tuneable central frequency tuner 33, which filters the input HFC television signals, as allocated to frequency band extending between 54 and 862 MHz, and allows the HFC television signal selected by a STB terminal 11 to pass to the output. The output television signal is then frequency translated by means of a mixer 34 that mixes it with the signal of a selectable frequency local oscillator 35, as well as a band-pass filter 36, having a constant amplitude pass band and tuneable central frequency. In particular, a logic unit 37 generates the control signals to be used to establish the central frequency of tuner 33, the frequency of oscillator 35 and the central frequency of filter 36. Figure 4b illustrates a schematic diagram showing the frequency distribution of the signal modulated with 64QAM modulation (64 symbol Quadrature Amplitude Modulation) with a band width of 8 MHz, as appearing at the output of the converter-filter of Figure 4a when the frequency translation operation reallocates the selected television signal to band 17 (extended S band).

By referring to Figure 5a, a first embodiment of the satellite radio frequency converter-filters includes a tuner 38, having a pass band of constant amplitude and tuneable central frequency, which filters the input satellite based television signals, as allocated to the frequency band extending from 950 and 2050 MHz, and allows the satellite based television signal selected by STB terminal 11 to pass to the output. In particular, the input satellite based television signals are modulated with Quaternary Phase Shift Keying (QPSK) modulation with a band width of 40 MHz. The television signal outputted by tuner 38 is then frequency translated by means of mixer 39 that mixes it with the signal of a selectable frequency local oscillator 40, as well as a band-pass filter 41, having a constant amplitude pass band and tuneable central frequency. In particular, a logic unit 42 generates the control signals to be used to establish the central frequency of tuner 38, the frequency of oscillator 40

and the central frequency of filter 41. In this case, channel QPSK appears to be reallocated, for instance to band 17, but it still occupies a band of 40 MHz. This means that the satellite radio frequency converter-filter of Figure 5a has a simple and low cost construction, but it still entails a band occupation 5 times larger than the band occupied by a 64QAM modulated signal, thereby reducing the number N of television channels allocable to facility 7. Furthermore, since the QPSK modulation is not compatible with STB terminals 11 for HFC television channels, an additional STB terminal 43 is anyway needed downstream of socket 8 in order to perform the transmodulation from QPSK to 64QAM system.

Figure 5b illustrates the preferred embodiment of the satellite radio frequency converter-filters, including a transmodulator 44 to perform filtering the selected television signal, transmodulating it from QPSK to 64QAM system as well as frequency reallocating the transmodulated signal. A logic unit 45 generates the control signals to be coupled to transmodulator 44 by selecting the filter central frequency and the reallocation central frequency. In this case, the converter-filter is more complex than that of Figure 5a, but it enables an output signal to be obtained with a band occupation of 8 MHz and compatible with the STB terminals 11 for HFC television channels.

As it is shown in Figure 3, each one of said N pairs of homologous outputs of the radio frequency conversion units 31 and 32, respectively, is coupled to one of N switches 46 that form a N output switching unit 47. In particular, each switch 46 corresponds to a STB terminal 11. Obviously, a HFC or satellite based television signal is present at the output of each switch 46, according to the selection of the corresponding STB terminal 11. Anyway, it is also possible to implement the arrangement so that, when the terminals connected at a given time are M, where $M < N$, the outputs of (N - M) switches 46 are in a high impedance condition. The N outputs (or the M active outputs) of said switching unit 47 are added in combiner 48 to the signals on the VHF output 19 and on the UHF output 20 of said filter unit 18 and to the signals belonging to the downstream data and/or voice channels of the telecommunication services available on output 23 of said filter 22. The output of combiner 48 forms the downstream channel that is conveyed from the exchange 1 through a duplexer 49 as well as the MATV facility 7 to the sockets 8 and to the user apparatuses 9.

Upstream channel that is conveyed from said user apparatuses 9 to exchange 1 through said MATV facility 7 is transmitted by duplexer 49 to a selector 50 of local data. Said upstream channel is preferably allocated to frequency band extending from 5 to 30 MHz. Selector 50 separates all those signal corresponding to television channel selections performed by active STB terminals 11, which form a local upstream data sequence, from signals belonging to upstream data and/or voice channel corresponding to telecommunication services. The signals belonging to upstream data and /or voice channels of telecommunication services are then passed unaltered and are transmitted to said HFC network 2.

The above mentioned local upstream data sequence, after demodulation by demodulator 5, is conveyed through an input/output (I/O) interface to a logic control unit 54 aimed at controlling said exchange 1, which, by decoding them, provides for reading the address of the caller unit (identification of the STB terminal 11 formulating the request) as well as for construing the request. Based upon the requests, said logic unit 54 generates (if necessary) the control signals controlling said filtering and frequency translating unit 30 as well as the local downstream data sequence for controlling said STB terminal 11. Such local downstream data sequence, through said interface unit 53 and a modulator 55, preferably a binary frequency variation modulator (FSK = Frequency Shifting Keying), is coupled to the input of combiner 48 in order to be added to other signals by which the downstream channel of said exchange 1 is formed. Preferably, the carrier of said local downstream data sequence is at a frequency of 40 MHz.

By referring now to Figure 6, it can be observed that said local downstream data sequence generated by logic unit 54 is arranged so that any data 56 routed to each specific STB terminal 11 are preceded by an address 57 which identifies the STB terminal 11 which they are related to.

By referring to Figure 7, a user apparatus 9 connected to MATV facility 7 by means of a socket 8 comprises a first band pass filter 58 that transfers the signal belonging to the local downstream data sequence to a FSK demodulator 59. The resulting demodulated signal is then conveyed to a logic unit 60 that processes it, by decoding the local downstream data sequence, for recognition of the address 57 belonging to said STB terminal 11 and interpretation of the information content of the

corresponding data 56. Based upon such decode operation, said logic unit 60 couples the control signals of said STB terminal 11 to a transmitter unit 61 that modulates them on an infrared ray (IR) carrier and transmits them to said STB terminal 11. It will be apparent to those skilled in the art that the transmission of decoded data 56 to STB terminal 11 can also be effected by means of other different methods, by utilizing corresponding architectures.

Furthermore, said user apparatus 9 can also be provided with a second band pass filter 62 that conveys any signals belonging to television channels as well as any signals belonging to data and/or voice downstream channels related to telecommunication services to a frequency multiplexer 63. Multiplexer 63 transmits all signals belonging to television channels to said STB terminal 11 and all signals belonging to data and /or voice downstream channels to a TELCO demodulator 64 for telecommunication services, which provider for conveying them to the corresponding terminals, such as a telephone set 10, a STB terminal 11 and a PC 12.

The data and/or voice upstream channels corresponding to telecommunication services outcoming from said telephone set 10, from said STB terminal 11 and from said PC 12 are modulated by a TELCO modulator 65 for telecommunication services. The signal travelling on an IR carrier outcoming from a remote controller 66 for selection of the television program and control of said STB terminal 11 is received by a receiver 67 and sent to a FSK modulator 68 that generates the local upstream data sequence related to the STB terminal 11 connected to the concerned user apparatus 9. The signals outcoming from said TELCO modulator 65 and from said FSK modulator 69 are added together in a combiner unit 69 and relayed to a further modulator 70. Modulator 70 in combination with a local oscillator 71 tuned on the frequency allotted to the specific concerned STB terminal 11 generates the upstream channel related to the considered user apparatus 9 and conveys it through a band pass filter 72 to the MATV facility 7 to enable it to reach the exchange 1. Preferably, the frequency on which said local oscillator 71 is tuned is comprised in the frequency band which extends from 5 to 30 MHz and coincides with the pass band of said filter 72. In particular, said local oscillator 71 can also transmit the signal for acknowledging the address of said STB terminal 11 to logic unit 60.

In this way, the selection performed by a user is routed to the exchange 1 rather than directly to said STB terminal 1, through said upstream channel by means of a combination of it with the TELCO data on a local oscillator of a frequency in the band of 5 to 30 MHz allotted to any individual user.

It will be apparent to those skilled in the art that the functions of said STB terminal 11 can be integrated with said user apparatus 9. Furthermore, the apparatus 9 can be adapted to manage or handle a number of user terminals (10, 11, 12) of the same type, as it can occur when a number of STB terminals 11 are connected downstream of said socket 8.

It will also be apparent to those skilled in the art that a system according to this invention can easily be modified and/or adapted to process signals belonging to further television and/or telecommunication services. By way of exemplification, as it is shown in Figures 4 and 5, CCTV systems 5 can be provided such that, by suitable insertion of signals related to video and/or audio and/or control functions into channels upstream or downstream of said exchange 1, they can be transmitted unaltered along said MATV facility 7 or they can be transmitted only if activated by the user and reallocated in frequency by said exchange 1.

It is also apparent that the system according to this invention can be applied to a case in which the signals belonging to satellite based television signals should not be distributed.

In conclusion, the already existing centralized coaxial antenna facility 7 is managed in intelligent mode by means of said exchange 1, positioned at a building node, and of the dedicated user apparatuses 9, connected to socket 8, in such a way as to enable the simultaneous distribution of conventional television signals as well as of signals belonging to HFC services and possibly also television signals received from satellites by means of one or more centralized parabolic antennas.

Said already existing or newly realized MATV facility 7 appears to be completely transparent to the usual broadcast or diffusion of land based television channels. In view of the above, exchange 1 is compatible with the usual services offered by said MATV facility 7 and any

user not desiring to be connected to further television or telecommunication services continues anyway to utilize the land based signals. On the opposite side, any user desiring to be connected to further services should provide his own coaxial socket 8 (any one in his flat) with the concerned user apparatus 9, which acts as a "concentrator" in respect of the various user terminals (10, 11, 12) installed in the concerned apartment. The connection between user apparatus 9 and said user terminals (10, 11, 12) is realized by means of standard interface units (telephone cable, coaxial cable or infrared coupling), but it is possible to realize a radio connection, as well.

Also the simple selection performed by the user of a desired (not land based) television channel in respect of any one of the various available services is "intercepted" and routed through the upstream flow to said exchange 1 where it is compared with other analogous selections and consequently managed. In this case, a local (building) data channel is involved which is possibly a portion of an upstream data flow of greater amplitude.

The above exchange 1 is coupled, on one side, to the various input services outcoming from the antennas and/or from external cables, namely the land based television channels, the HFC telecommunication services, the satellite based television channels and, on the other side, namely the output side, to coaxial cable of said MATV distribution facility 7.

The system proposed according to this invention is provided with a high compatibility grade with further future possible telecommunication services; in other words, it is an "open" system in respect of transferring data in both directions at a significant bit rate for the concerned services.

Apparatus 9 performs the function to "dialogue" with said exchange 1 (in order to manage the MATV facility 7 in a suitable form to convey a plurality of interactive and not-interactive television services) and, at the same time, it is "open" to conveying telecommunication signals so that said MATV facility 7 can be effectively considered as a natural completion of radio based point-multipoint or PTM access systems presently studied, in order to easily apply such PTM systems in urban

areas where the users are to a large extent distributed in buildings and apartments.

In particular, the subsystem of said user apparatus 9 which is part of the access network for telecommunications is integrated with the local functions, as above described, in order to perform the television signal switching function. Aiming at rendering such subsystem perfectly integral and transparent, the typical functions of modems are subdivided into the basic functions of modulation and demodulation in user apparatus 9 and subsequently grouped, namely only modulation or only demodulation, in order to introduce the related signals from the PTM system into the upstream flow or to extract them all from the related downstream flow; in Figure 7, such circuit subunits are shown as TELCO modulator 65 and TELCO demodulator 64, respectively. Obviously, such signals to/from the related external user terminals (10, 11, 12) is realized within the concerned user apparatus 9.

It will also be apparent to those skilled in the art that the construction of said user apparatus 9 is not unique and that it is easily modifiable, since it is correlated with the services which should be delivered to the users and conclusively with the user terminals to be interconnected.

The preferred embodiment of this invention has been hereinbefore explained by way of illustration and not by way of limitation, and it should be understood that those skilled in the art can make variations and/or changes therein without departing from the scope of this invention, as defined by the following claims.

CLAIMS

1:- An optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12), said television services including land based radio frequency broadcast television channels, satellite based radio frequency broadcast television channels and HFC network or cable based broadcast television channels, each of said telecommunication services including a downstream data and/or voice channel and an upstream data and/or voice channel, said system also including a bi-directional switch exchange (1) connected to said peripheral node, a facility (7) for bi-directional distribution of signals connected to said exchange (1) and at least a user apparatus (9) connected to said bi-directional facility (7) as well as to said user terminals (10, 11, 12), said exchange (1) comprising a filter (22), a frequency filtering and translating unit (30), a logic control unit (54), a combiner (48) and a selector (50), said combiner (48) and selector (50) being connected to said bi-directional distribution facility (7), the signals belonging to said land based television channels being applied to the input of said combiner (8), said filter (22) receiving the signals belonging to said cable based television channels and to said downstream data and/or voice channels, said filter (22) separating the signals belonging to said downstream data and/or voice channels from the signals belonging to said cable based television channels, said filter (22) also reallocating the signals belonging to said downstream data and/or voice channels to pre-established frequencies and applying them to the input of said combiner (48), said filter (22) also applying the signals belonging to said cable based television channels to said frequency filtering and translating unit (30), the signals belonging to said satellite based television channels being also applied to said frequency filtering and translating unit (30), said selector (50) being connected to said bi-directional distribution facility (7) in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit (54) and to receive the signals belonging to said upstream data and/or voice channels therefrom and to apply them to said peripheral node, said control logic unit (54) generating the control signals to be applied to said frequency filtering and translating unit (30) and a local downstream data sequence to be applied to the input of said combiner (48), said frequency filtering and translating unit (30) selecting the input signals and frequency reallocating and/or translating them for

applying them to the input of said combiner (48), said combiner (48) mixing the input signals and applying them to said bi-directional distribution facility (7), said user apparatus (9) including a demodulator (59), a logic unit (60), a modulator (68) and a combiner (69), said logic unit (60) processing said local downstream data sequence outcoming from said demodulator (59), said modulator (68) modulating a local upstream data sequence related to said user apparatus (9), said combiner (69) mixing the signals belonging to said local upstream data sequence as well as the signals belonging to upstream data and /or voice channels related to said user apparatus (9) and applying them to said bi-directional distribution facility (7).

2.- A system according to claim 1, characterized in that said exchange (1) further comprises, upstream of said combiner (8), a unit (18) for filtering the signals belonging to said land based television channels, which eliminates all replicated signals having the worst signal-to-noise ratio (SNR).

3.- A system according to claim 1 or 2, characterized in that said television services further comprise television channels related to closed circuit television systems (CCTV) that are coupled to the input of said combiner (48) or to said frequency filtering and translating unit (30).

4.- A system according to any one of the preceding claims, characterized in that said frequency filtering and translating unit (30) comprises a converter unit (31) for conversion of HFC radio frequencies, a converter unit (32) for conversion of satellite based radio frequencies as well as a switch unit (47), said converter units (31, 32) having N inputs and N outputs, said switch unit (47) having $2 \cdot N$ inputs and N outputs, the homologous outputs of both said converter units (31, 32) being alternatively selected by said switch unit (47) and outputted to said frequency filtering and translating unit (30).

5.- A system according to claim 4, characterized in that said HFC radio frequency converter unit (31) comprises N converter-filters, each of which comprises a tuner (33) having a constant amplitude pass band and tuneable central frequency, a mixer (34), a selectable frequency local oscillator (35), a band pass filter (36) having a constant amplitude pass band and a tuneable central frequency, as well as a logic unit (37), said tuner (33) filtering said input signal, said mixer (34), said local

oscillator (35) and said pass band filter (36) translating the frequency of the filtered signal and said logic unit (37) generating the control signals.

5 6.- A system according to claim 4 or 5, characterized in that said satellite based radio frequency converter unit (32) comprises N converter-filters, each of which comprises a tuner (38) having a constant amplitude pass band and tuneable central frequency, a mixer (39), a selectable frequency local oscillator (40), a band pass filter (41) having a constant amplitude pass band and a tuneable central frequency, as well as a logic unit (42), said tuner (38) filtering said input signal, said mixer (39), said local oscillator (40) and said pass band filter (41) translating the frequency of the filtered signal and said logic unit (42) generating the control signals.

10 7.- A system according to claim 6, characterized in that each of said N converter-filters comprised in said satellite based radio frequency converter unit (32) further comprises a transmodulator (43).

20 8.- A system according to claim 4 or 5, characterized in that said satellite based radio frequency converter unit (32) comprises N converter-filters, each of which comprises a transmodulator (44) and a control logic unit (45), said transmodulator (44) filtering, transmodulating and frequency translating the input signal.

25 9.- A system according to any one of the preceding claims, characterized in that said signal bi-directional distribution facility (7) is an apparatus for centralized distribution of land based television channels or a Master Antenna TV (MATV) facility.

10.- A system according to any one of the preceding claims, characterized in that each user apparatus (9) is connected to one or more telephone device (10) and/or to one or more Personal Computer (PC) (12).

30 11.- A system according to any one of the preceding claims, characterized in that each user apparatus (9) is connected to one or more communication apparatuses (11) or Set-Top-Box (STB), with a pay television service provider.

35 12.- A system according to any one of the preceding claims, characterized in that the local upstream or local downstream data sequences are modulated by digital modulation.

13.- A system according to claim 12, characterized in that said digital modulation is a FSK and/or a PSK and/or QAM modulation.

5 14.- A system according to claim 12 or 13, characterized in that said user apparatus (9) further comprises a digital demodulator (59) arranged upstream of said logic unit (60), a frequency multiplexer (63) and a TELCO demodulator (64) for telecommunication services, arranged upstream of said user terminals (10, 11, 12), a TELCO modulator (65) for telecommunication services, arranged downstream of said user terminals (10, 11, 12), a digital modulator (68) which receives the television
10 channel selection data from at least one user terminal (11) as well as a combiner (69) arranged downstream of said TELCO modulator (65) and of said digital modulator (68) and upstream of said bi-directional distribution facility.

15 15.- An optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12) according to any one of the preceding claims and substantially as illustrated and described.

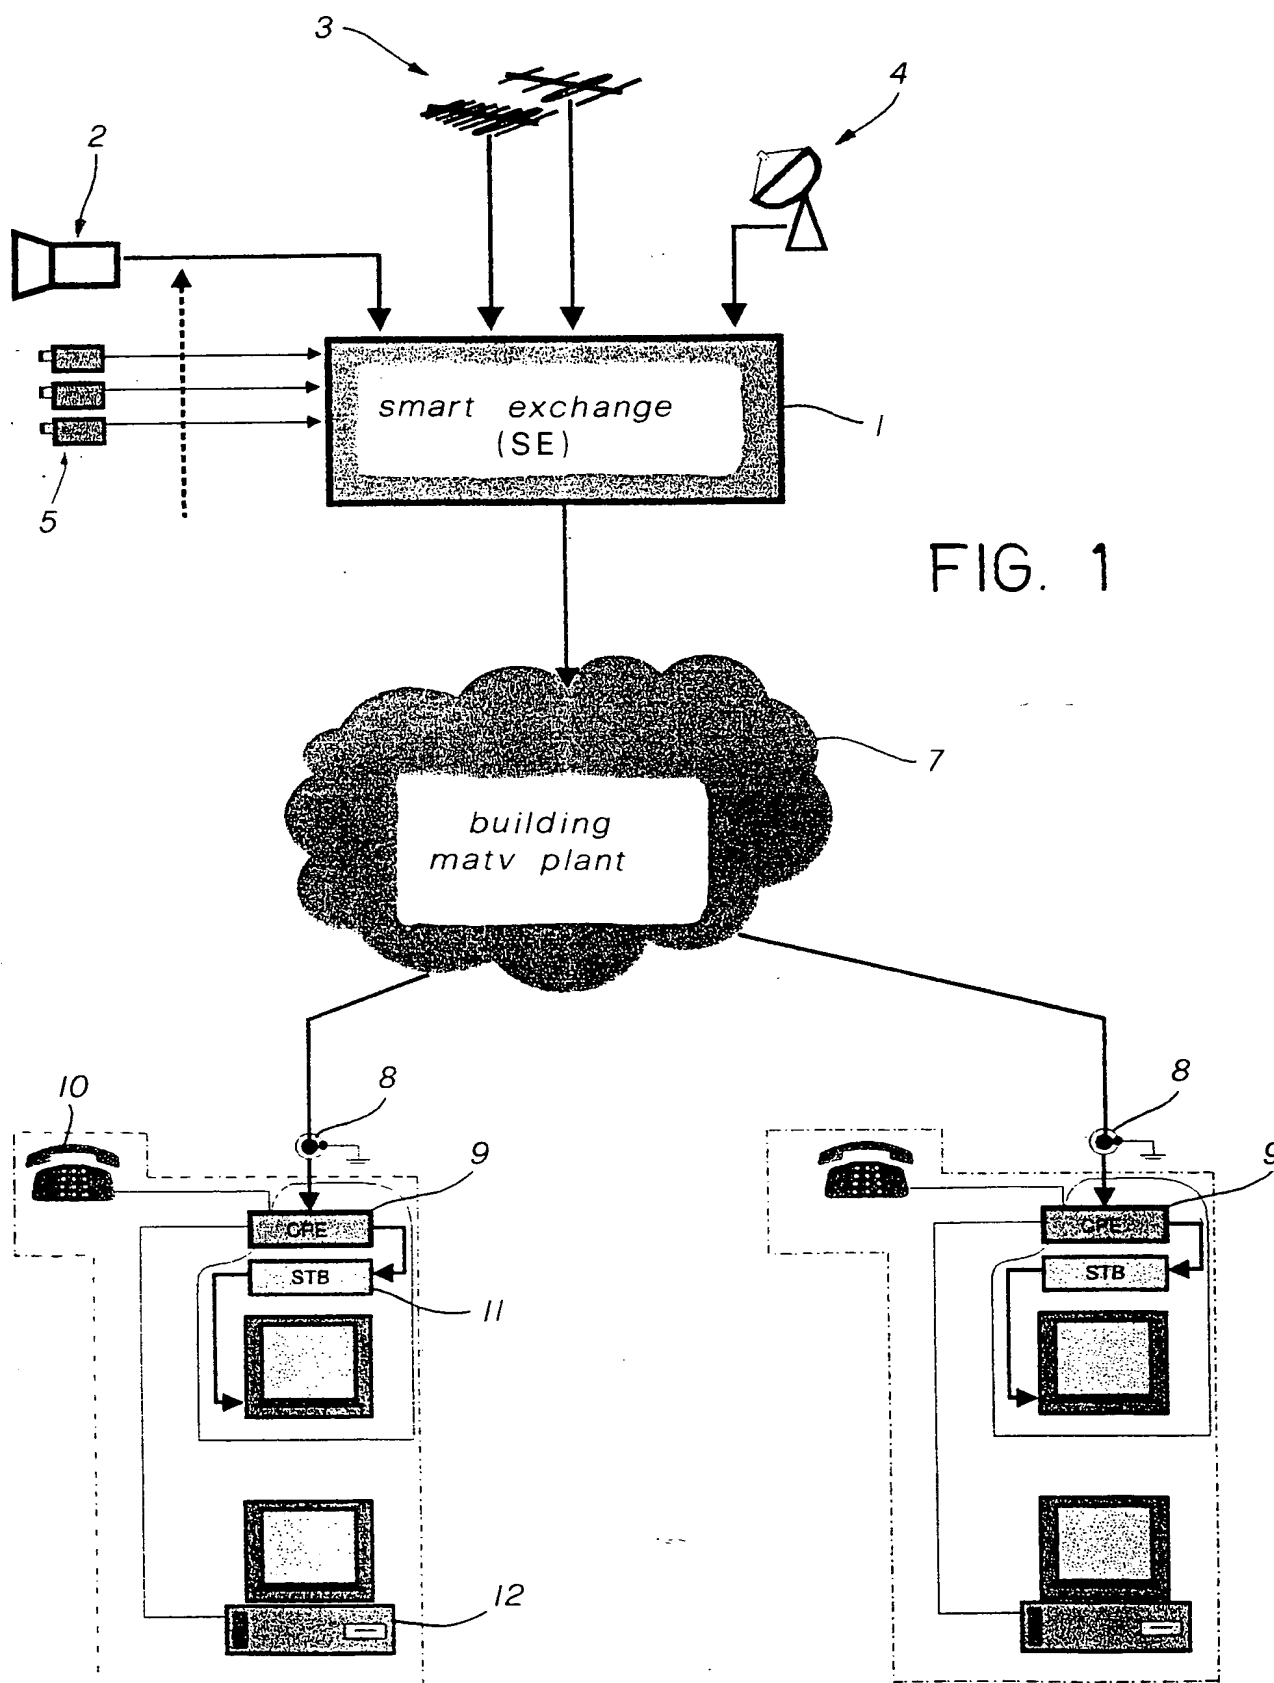


FIG. 1

THIS PAGE BLANK (USPTO)

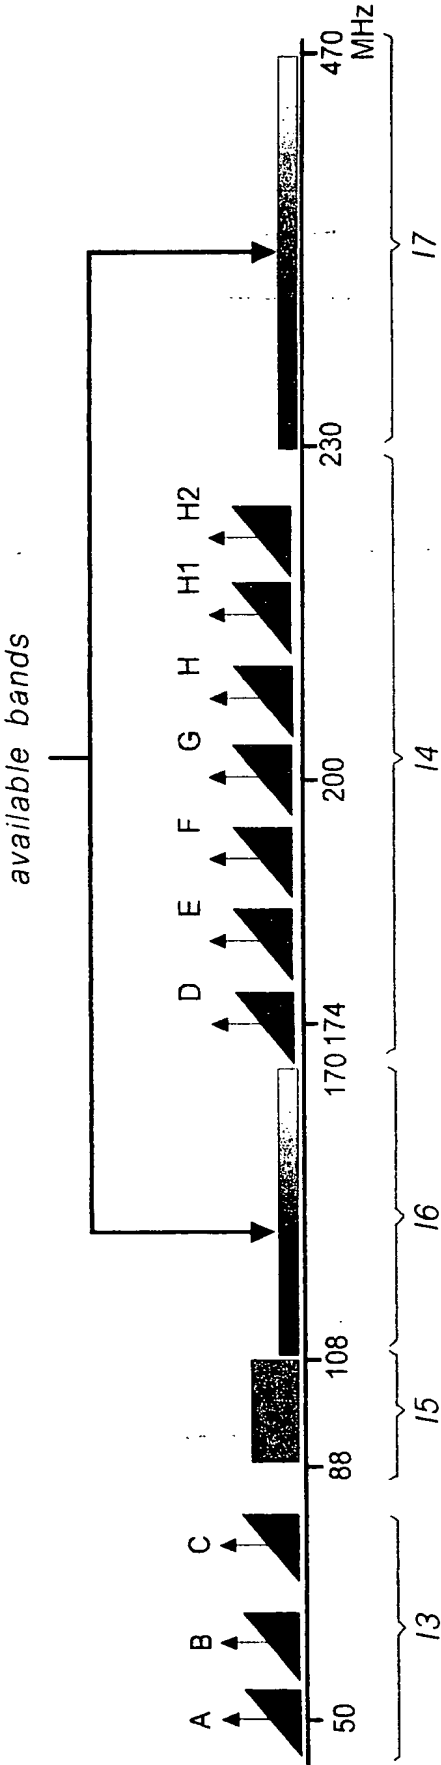


FIG. 2


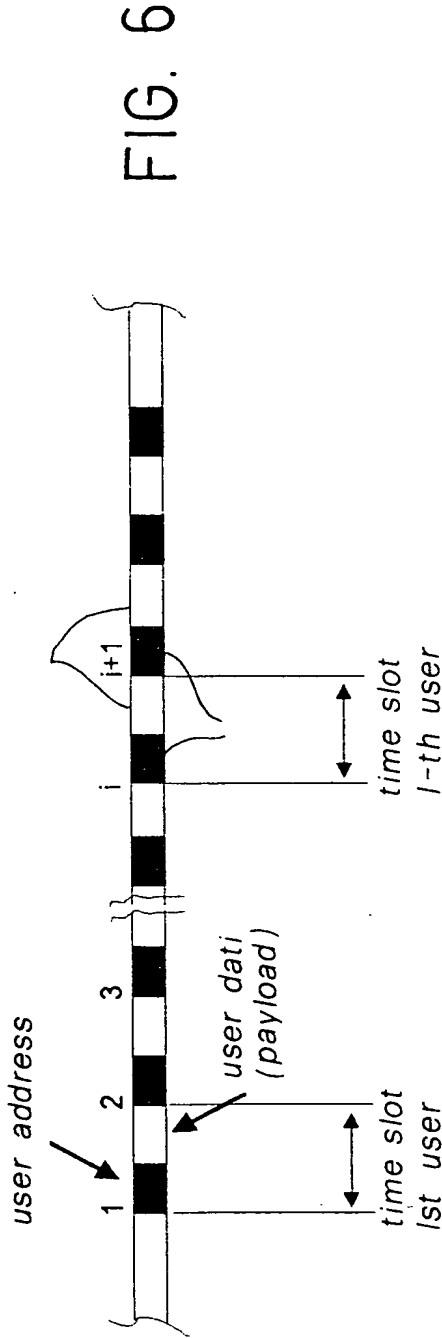


FIG. 6

THIS PAGE BLANK (USPTO)

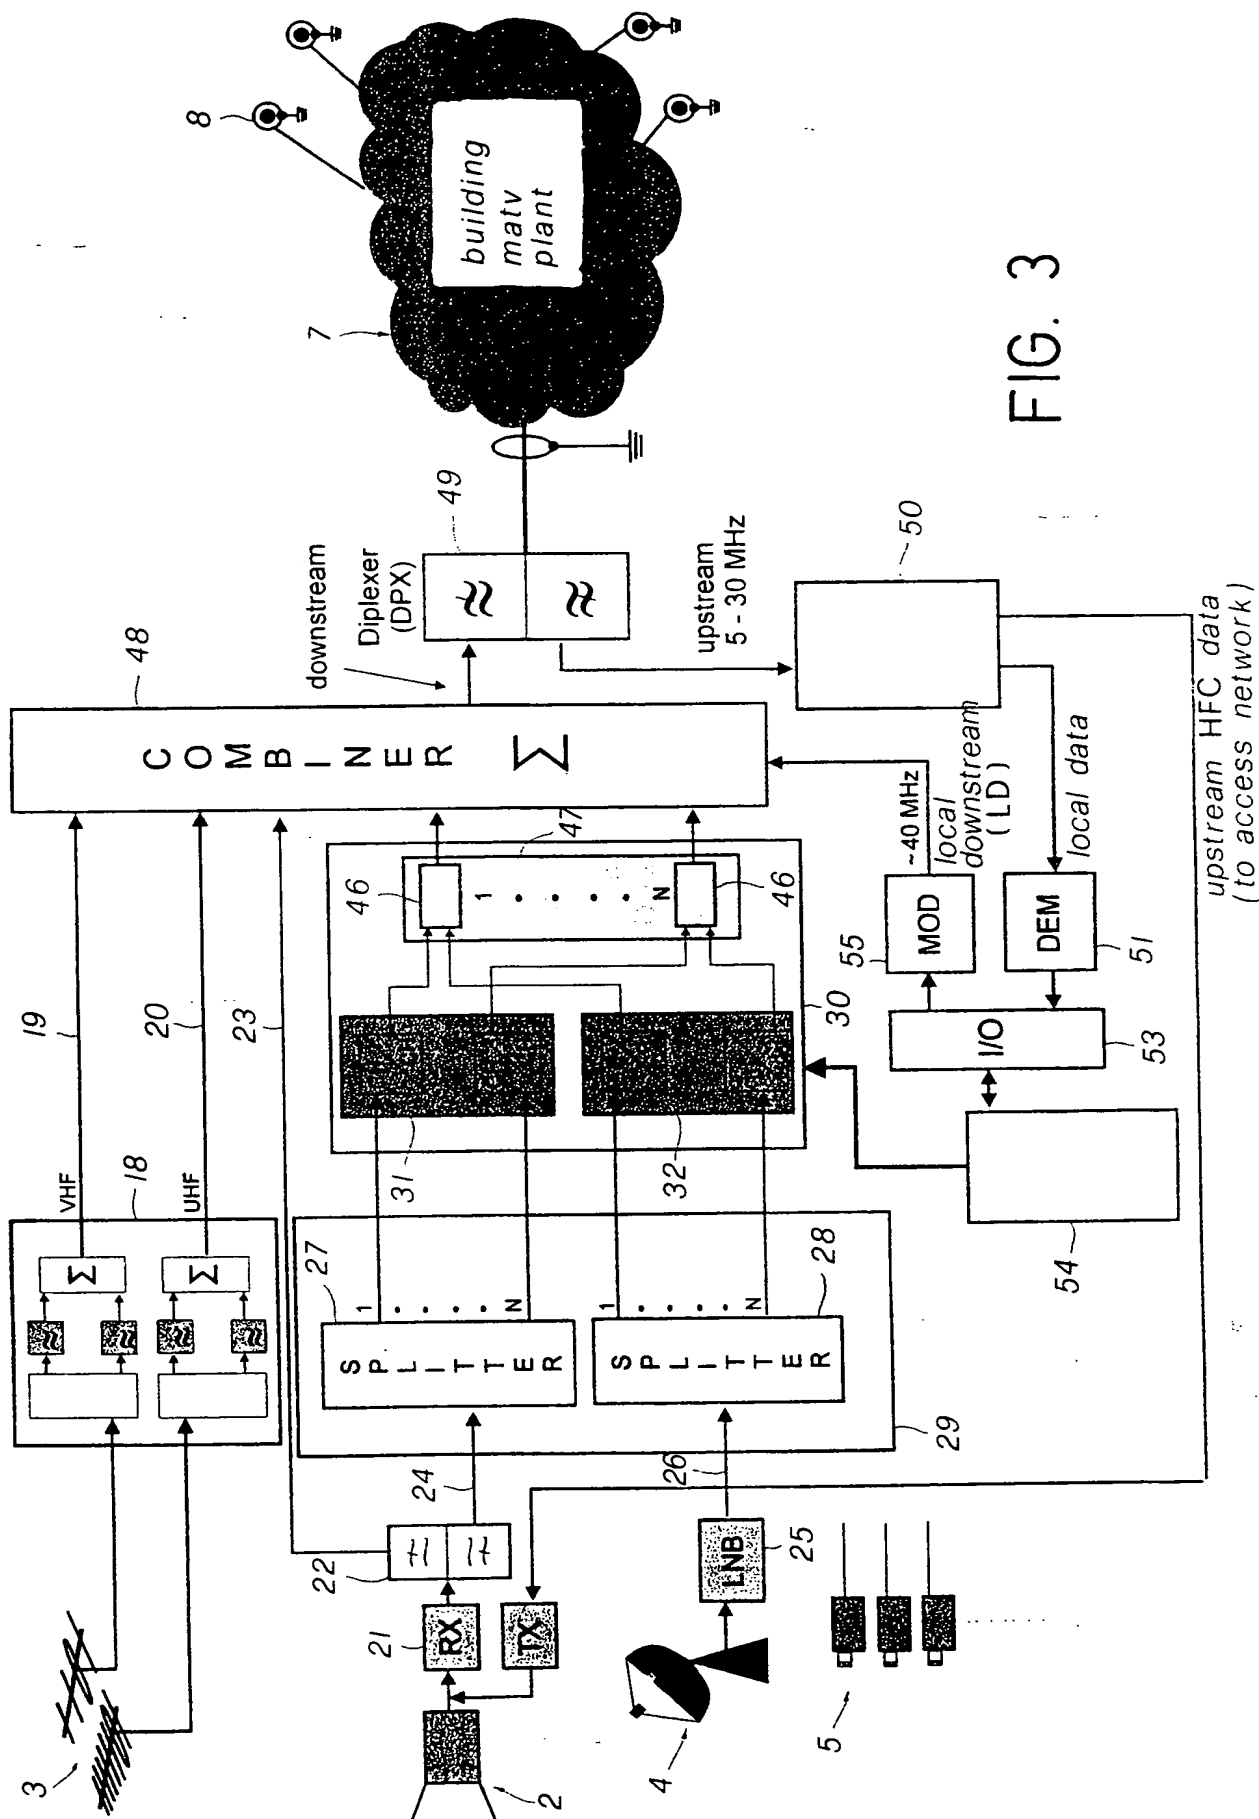

F/G. 3

THIS PAGE BLANK (USPTO)

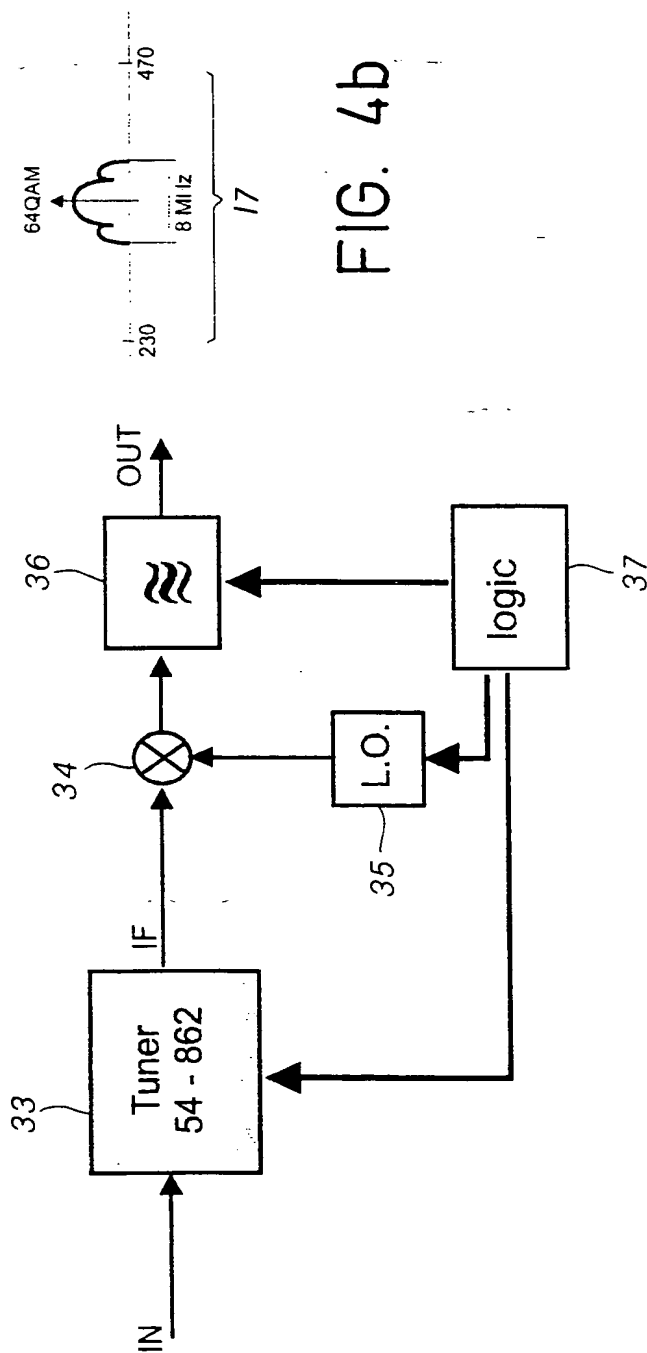


FIG. 4b

FIG. 4a

THIS PAGE BLANK (USPTO)

FIG. 5a

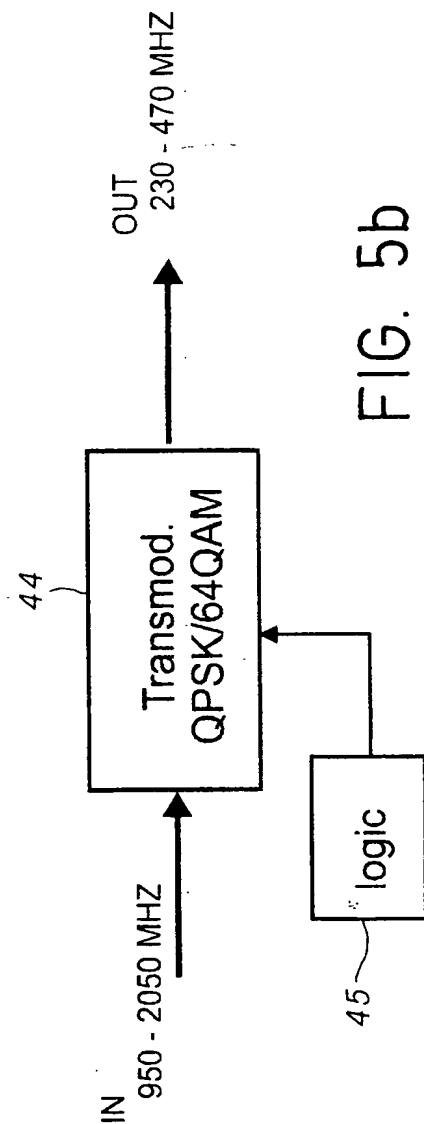
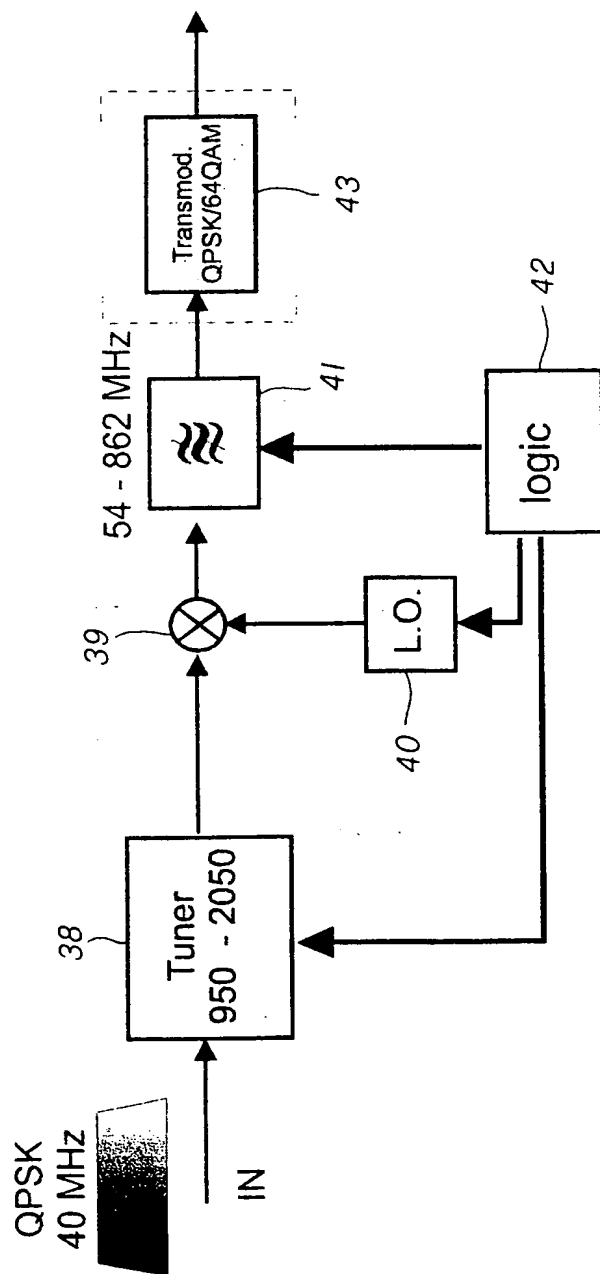


FIG. 5b

THIS PAGE BLANK (USPTO)

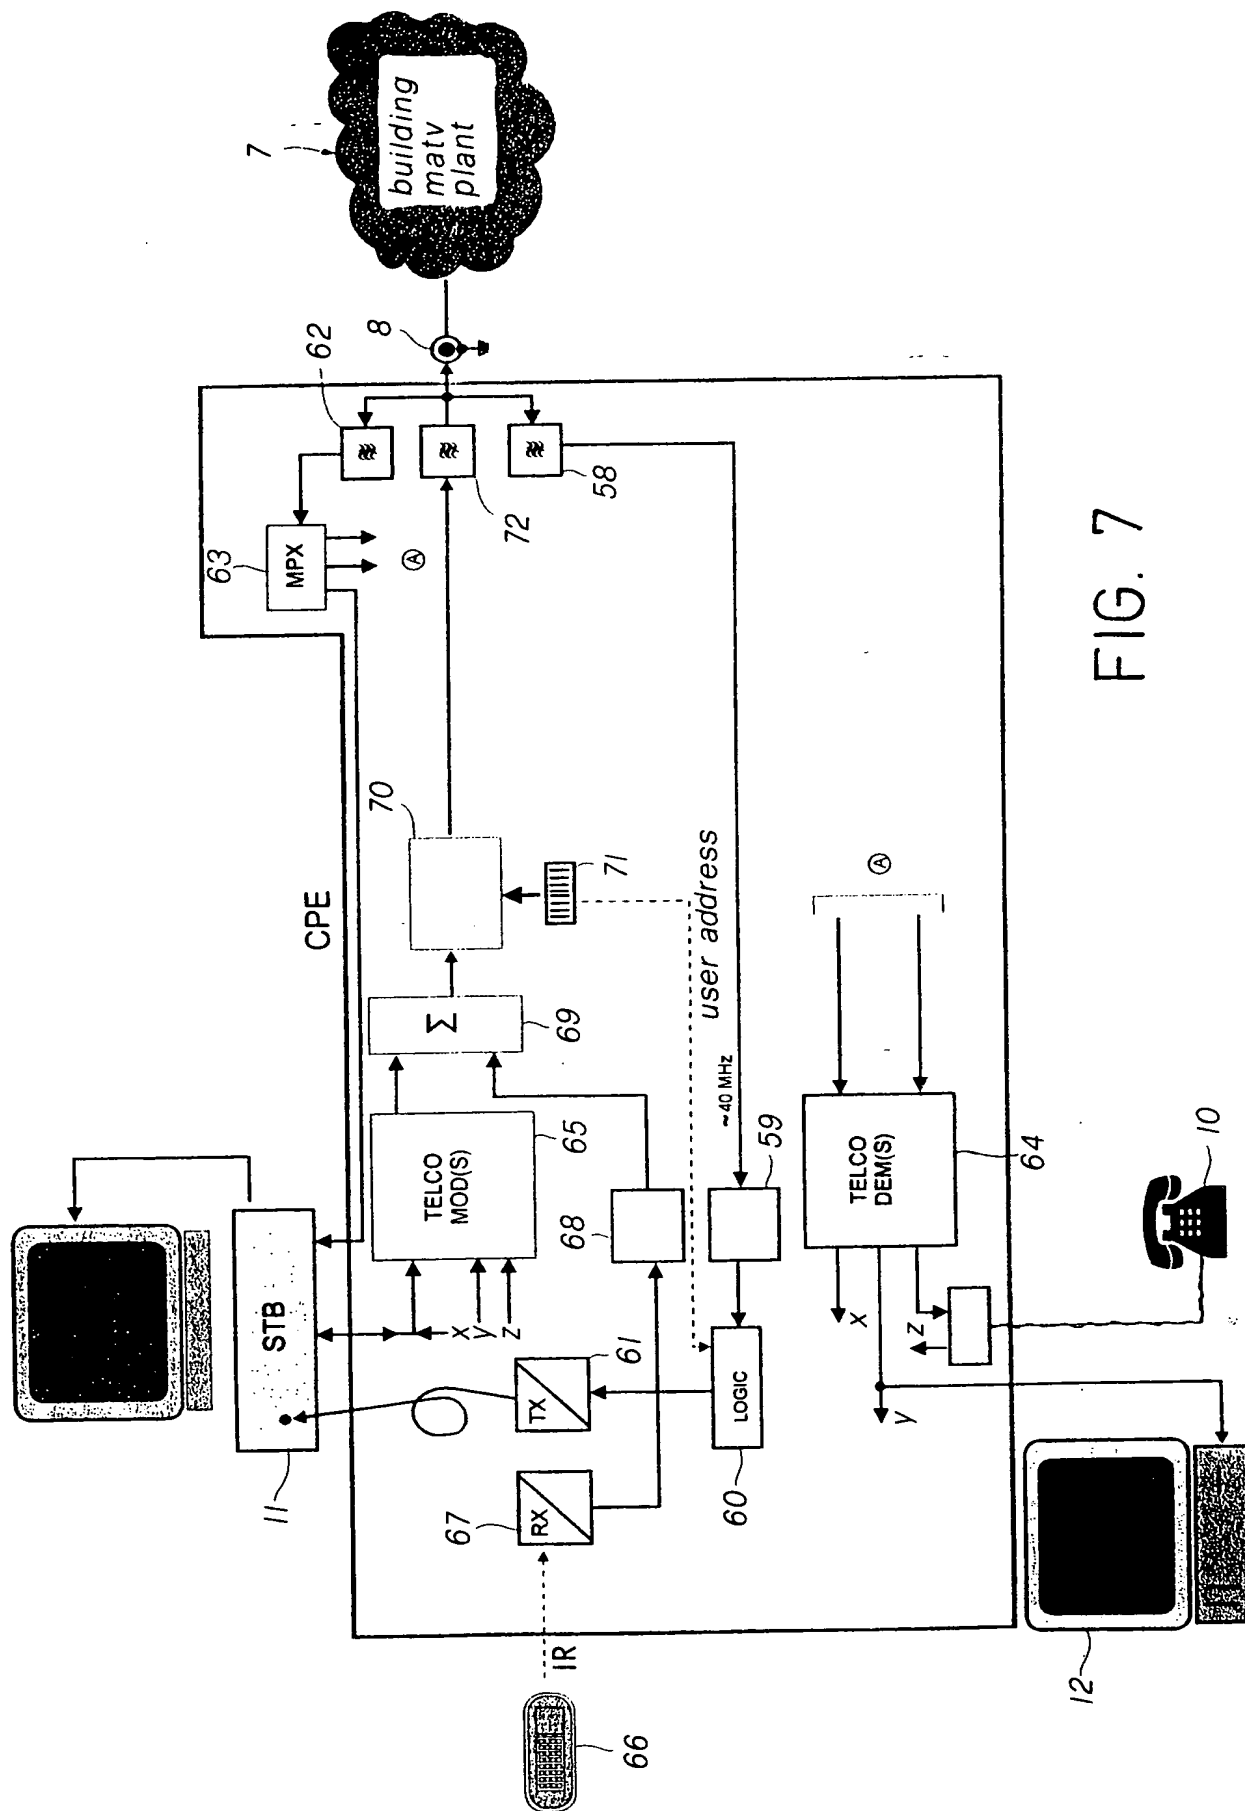


FIG. 7

THIS PAGE BLANK (USPTO)

INTERNATIONAL SEARCH REPORT

International Application No

PC/IT 99/00178

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 H04N7/173

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 H04N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 96 24989 A (ADC TELECOMMUNICATIONS INC) 15 August 1996 (1996-08-15) abstract page 15, line 27 -page 20, line 30; figures 1-6 ---	1
A	WO 97 01236 A (SCIENTIFIC ATLANTA) 9 January 1997 (1997-01-09) page 3, paragraph 2 -page 7, paragraph 2; figures 2,3 ---	1
A	EP 0 779 740 A (FLUIT JACOBUS PETRUS V D) 18 June 1997 (1997-06-18) column 1, line 1 -column 4, line 17; figures 1-3 --- -/--	1

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

29 September 1999

Date of mailing of the international search report

05/10/1999

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Fuchs, P

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IT 99/00178

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>EP 0 756 393 A (THOMSON BROADCAST SYSTEMS) 29 January 1997 (1997-01-29) abstract; figures 5,7 -----</p>	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IT 99/00178

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9624989	A	15-08-1996	AU 703284 B	25-03-1999
			AU 4915896 A	27-08-1996
			AU 694620 B	23-07-1998
			AU 4916296 A	27-08-1996
			AU 703879 B	01-04-1999
			AU 8713698 A	03-12-1998
			AU 703639 B	25-03-1999
			AU 8713798 A	03-12-1998
			AU 704758 B	06-05-1999
			AU 8714198 A	19-11-1998
			AU 703459 B	25-03-1999
			AU 8714298 A	10-12-1998
			AU 703463 B	25-03-1999
			AU 8714398 A	26-11-1998
			BR 9607031 A	04-11-1997
			CA 2211117 A	15-08-1996
			CA 2211803 A	15-08-1996
			CN 1193433 A	16-09-1998
			CZ 9702487 A	17-12-1997
			EP 0809898 A	03-12-1997
			EP 0808534 A	26-11-1997
			FI 973134 A	06-10-1997
			JP 10507051 T	07-07-1998
			JP 10513622 T	22-12-1998
			NZ 302973 A	26-08-1998
			WO 9624995 A	15-08-1996
WO 9701236	A	09-01-1997	AU 6386896 A	22-01-1997
			CA 2222603 A	09-01-1997
			EP 0873638 A	28-10-1998
EP 0779740	A	18-06-1997	NL 1001909 C	17-06-1997
EP 0756393	A	29-01-1997	FR 2737365 A	31-01-1997
			JP 9130350 A	16-05-1997

THIS PAGE BLANK (USPTO)

PATENT COOPERATION TREATY

PCT

REC'D 07 JUL 2000

WIPO PCT

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

(PCT Article 36 and Rule 70)

Applicant's or agent's file reference PCT24072		FOR FURTHER ACTION See Notification of Transmittal of International Preliminary Examination Report (Form PCT/IPEA/416)	
International application No. PCT/IT99/00178	International filing date (day/month/year) 18/06/1999	Priority date (day/month/year) 13/07/1998	
International Patent Classification (IPC) or national classification and IPC H04N7/173			
Applicant CHEPA VERWALTUNGS S.A. et al.			

1. This international preliminary examination report has been prepared by this International Preliminary Examining Authority and is transmitted to the applicant according to Article 36.


2. This REPORT consists of a total of 5 sheets, including this cover sheet.

☒ This report is also accompanied by ANNEXES, i.e. sheets of the description, claims and/or drawings which have been amended and are the basis for this report and/or sheets containing rectifications made before this Authority (see Rule 70.16 and Section 607 of the Administrative Instructions under the PCT).

These annexes consist of a total of 9 sheets.

3. This report contains indications relating to the following items:

- I ☒ Basis of the report
- II ☐ Priority
- III ☐ Non-establishment of opinion with regard to novelty, inventive step and industrial applicability
- IV ☐ Lack of unity of invention
- V ☒ Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement
- VI ☐ Certain documents cited
- VII ☐ Certain defects in the international application
- VIII ☐ Certain observations on the international application

Date of submission of the demand 11/01/2000	Date of completion of this report 06.07.2000
Name and mailing address of the international preliminary examining authority:  European Patent Office D-80298 Munich Tel. +49 89 2399 - 0 Tx: 523656 epmu d Fax: +49 89 2399 - 4465	Authorized officer Montanari, M Telephone No. +49 89 2399 2602



THIS PAGE BLANK (USPTO)

INTERNATIONAL PRELIMINARY EXAMINATION REPORT

International application No. PCT/IT99/00178

I. Basis of the report

1. This report has been drawn on the basis of (*substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this report as "originally filed" and are not annexed to the report since they do not contain amendments.*):

Description, pages:

2,3,5-13,15-18	as originally filed			
1,1bis,4,4bis, 14	as received on	28/06/2000	with letter of	28/06/2000

Claims, No.:

1 (part),2-12	as originally filed			
1 (part),13,14	as received on	28/06/2000	with letter of	28/06/2000

Drawings, sheets:

2/6-6/6	as originally filed			
1/6	as received on	28/06/2000	with letter of	28/06/2000

2. The amendments have resulted in the cancellation of:

- ☐ the description, pages:
☒ the claims, Nos.: 15
☐ the drawings, sheets:

3. ☐ This report has been established as if (some of) the amendments had not been made, since they have been considered to go beyond the disclosure as filed (Rule 70.2(c)):

4. Additional observations, if necessary:

THIS PAGE BLANK (USPTO)

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT**

International application No. PCT/IT99/00178

V. Reasoned statement under Article 35(2) with regard to novelty, inventive step or industrial applicability; citations and explanations supporting such statement

1. Statement

Novelty (N)	Yes:	Claims	1-14
	No:	Claims	
Inventive step (IS)	Yes:	Claims	1-14
	No:	Claims	
Industrial applicability (IA)	Yes:	Claims	1-14
	No:	Claims	

2. Citations and explanations

see separate sheet

THIS PAGE BLANK (USPTO)

**INTERNATIONAL PRELIMINARY
EXAMINATION REPORT - SEPARATE SHEET**

International application No. PCT/IT99/00178

The examination is being carried out on the following application documents:

Text for the Contracting States:

AT BE CH DE DK ES FI FR GB GR IT IE LI LU MC NL PT SE

Description, pages:

2,3,5-13,15-18 as originally filed

1,1bis,4,4bis, 14	as received on	28/06/2000	with letter of	28/06/2000
----------------------	----------------	------------	----------------	------------

Claims, No.:

1 (part),2-12 as originally filed

1 (part),13,14	as received on	28/06/2000	with letter of	28/06/2000
----------------	----------------	------------	----------------	------------

Drawings, sheets:

2/6-6/6 as originally filed

1/6	as received on	28/06/2000	with letter of	28/06/2000
-----	----------------	------------	----------------	------------

1. Reference is made to the following document:

D1: WO-A-96/24989

2. Claim 1

2.1 Document D1, considered to be the closest prior art, discloses a system for distribution of television and other telecommunication services from a peripheral node to user terminals (see figure 1, ref. 46), including downstream and upstream data and/or voice channels. Said system includes (using the present application's terminology) facilities for bidirectional distribution of signals to said user terminals (see figure 1, ODN), said facilities being connected to a bidirectional switch exchange (32).

THIS PAGE BLANK (USPTO)

However, in the above-cited document there is no disclosure of the additional features claimed in combination in claim 1, and particularly of a filter connected to a frequency filtering and translating unit for cable-based television channels, in turn connected to a combiner for combining said channels with land-based broadcast channels and sending the combined channels to a bidirectional distribution facility. Nor there is disclosure of a control logic unit for controlling said frequency filtering and translating unit, said control unit being controlled by signals sent by said bidirectional distribution facility.

Further, said features in combination cannot be regarded as obvious to the skilled person.

- 2.2 Consequently, the subject-matter of claim 1 meets the requirements of Article 33(2) and (3) PCT.

Further, since systems for distribution of television and other telecommunication services from a peripheral node to user terminals are commonly made and used in the industry, the subject-matter of claim 1 meets the requirements of Article 33(4) PCT too.

3. Dependent claims

The dependent claims relate to the general subject-matter of the application as a whole, matter considered to be novel and inventive. Thus they meet the requirements of Article 33(2), (3) and (4) PCT.

THIS PAGE BLANK (USPTO)

11 28 06 00

OPTIMIZED SYSTEM FOR DISTRIBUTING TELEVISION AND
TELECOMMUNICATION SERVICES FROM A PERIPHERAL NODE TO
USER TERMINALS

5 This invention relates to an optimized system for distributing
television and telecommunication services from a peripheral node to user
terminals.

10 More particularly, this invention relates to a system of the
above mentioned kind that enables the already existing facilities designed
for centralized distribution of land based television channels, also known
as Master Antenna TV (MATV) to also be adapted, in economically
convenient and reliable way, to simultaneously distribute other television
and telecommunication services, also including the interactive services.

15 It is known that, in Italy as well as in many other countries,
hybrid telecommunication networks based upon coaxial cables and fibers,
also known as HFC (Hybrid Fiber-Coax) networks, are being presently
developed and largely utilized, to distribute many services, particularly
multi-medial services of interactive type.

20 Such HFC networks are based upon peripheral nodes to
distribute the signals to the individual user terminals connected thereto.
This is the case, for instance, of a building node connected by means of
suitable cables to the network in order to distribute the signals to the
users arranged throughout the building itself. In this respect, some
building nodes can be connected to the network, at least in so far the
television services are concerned, by means of a Microwave Video
25 Distribution Service, namely by means of so-called MVDS radio links.

The interactive telecommunication services include data and/or
voice return or upstream channels from the individual user terminals to
the concerned peripheral node, such as a building node, connected to
them and subsequently to the network.

30 Particularly, document WO-A-96/24989 discloses a system for
distribution of television and other telecommunication services from a
peripheral node to user terminals, including downstream and upstream
data and/or voice channels. Said system includes facilities for
bidirectional distribution of signals to said user terminals, said facilities
35 being connected to a bidirectional switch exchange.

THIS PAGE BLANK (USPTO)

M 28.06.00

1 bis

Reference will be particularly made hereinafter to building nodes considered as peripheral nodes, but it should be understood that the system according to this invention can be applied to any peripheral node.

- 5 The architectures of the facilities designed to distribute the various services from a building node to the individual user terminals

THIS PAGE BLANK (USPTO)

11 28.05.00

4

unit, said selector being connected to said bi-directional distribution facility in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit and to receive the signals belonging to said upstream data and/or voice channels from said bi-directional distribution facility and to apply them to said peripheral node, said control logic unit generating the control signals to be applied to said frequency filtering and translating unit and a local downstream data sequence to be applied to the input of said combiner, said frequency filtering and translating unit selecting the signals belonging to both said cable based television channels and said satellite based television channels and frequency reallocating and/or translating them for applying them to the input of said combiner, said combiner mixing the input signals and applying them to said bi-directional distribution facility, said user apparatus including a demodulator, a logic unit, a modulator and a combiner, said logic unit processing said local downstream data sequence outcoming from said demodulator, said modulator modulating a local upstream data sequence related to said user apparatus, said combiner mixing the signals belonging to said local upstream data sequence as well as the signals belonging to upstream data and /or voice channels related to said user apparatus and applying them to said bi-directional distribution facility.

According to this invention, said exchange further comprises, upstream of said combiner, a unit for filtering the signals belonging to said land based television channels, which eliminates all replicated signals having the worst signal-to-noise ratio (SNR).

Still according to this invention, said television services further comprise television channels related to closed circuit television systems (CCTV) that are coupled to the input of said combiner or to said frequency filtering and translating unit.

Further according to this invention, said frequency filtering and translating unit comprises a converter unit for conversion of HFC radio frequencies, a converter unit for conversion of satellite based radio frequencies as well as a switch unit, said converter units having N inputs and N outputs, said switch unit having $2 \cdot N$ inputs and N outputs, the homologous outputs of both said converter units being alternatively

THIS PAGE BLANK (USPTO)

M 28.06.00

4 bis

selected by said switch unit and transferred to said frequency filtering and translating unit.

THIS PAGE BLANK (USPTO)

M 20.05.00

14

Upstream channel that is conveyed from said user apparatuses 9 to exchange 1 through said MATV facility 7 is transmitted by duplexer 49 to a selector 50 of local data. Said upstream channel is preferably allocated to frequency band extending from 5 to 30 MHz. Selector 50 separates all those signal corresponding to television channel selections performed by active STB terminals 11, which form a local upstream data sequence, from signals belonging to upstream data and/or voice channel corresponding to telecommunication services. The signals belonging to upstream data and /or voice channels of telecommunication services are then passed unaltered and are transmitted to said HFC network 2.

The above mentioned local upstream data sequence, after demodulation by demodulator 51, is conveyed through an input/output (I/O) interface to a logic control unit 54 aimed at controlling said exchange 1, which, by decoding them, provides for reading the address of the caller unit (identification of the STB terminal 11 formulating the request) as well as for construing the request. Based upon the requests, said logic unit 54 generates (if necessary) the control signals controlling said filtering and frequency translating unit 30 as well as the local downstream data sequence for controlling said STB terminal 11. Such local downstream data sequence, through said interface unit 53 and a modulator 55, preferably a binary frequency variation modulator (FSK = Frequency Shifting Keying), is coupled to the input of combiner 48 in order to be added to other signals by which the downstream channel of said exchange 1 is formed. Preferably, the carrier of said local downstream data sequence is at a frequency of 40 MHz.

By referring now to Figure 6, it can be observed that said local downstream data sequence generated by logic unit 54 is arranged so that any data 56 routed to each specific STB terminal 11 are preceded by an address 57 which identifies the STB terminal 11 which they are related to.

By referring to Figure 7, a user apparatus 9 connected to MATV facility 7 by means of a socket 8 comprises a first band pass filter 58 that transfers the signal belonging to the local downstream data sequence to a FSK demodulator 59. The resulting demodulated signal is then conveyed to a logic unit 60 that processes it, by decoding the local downstream data sequence, for recognition of the address 57 belonging to said STB terminal 11 and interpretation of the information content of the

THIS PAGE BLANK (USPTO)

M 28.06.00

19

CLAIMS

1.- An optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12), said television services including land based radio frequency broadcast television channels, satellite based radio frequency broadcast television channels and HFC network or cable based broadcast television channels, each of said telecommunication services including a downstream data and/or voice channel and an upstream data and/or voice channel, said system also including a bi-directional switch exchange (1) connected to said peripheral node, a facility (7) for bi-directional distribution of signals connected to said exchange (1) and at least a user apparatus (9) connected to said bi-directional facility (7) as well as to said user terminals (10, 11, 12), characterised in that said exchange (1) comprising a filter (22), a frequency filtering and translating unit (30), a logic control unit (54), a combiner (48) and a selector (50), said combiner (48) and selector (50) being connected to said bi-directional distribution facility (7), the signals belonging to said land based television channels being applied to the input of said combiner (8), said filter (22) receiving the signals belonging to said cable based television channels and to said downstream data and/or voice channels, said filter (22) separating the signals belonging to said downstream data and/or voice channels from the signals belonging to said cable based television channels, said filter (22) also reallocating the signals belonging to said downstream data and/or voice channels to pre-established frequencies and applying them to the input of said combiner (48), said filter (22) also applying the signals belonging to said cable based television channels to said frequency filtering and translating unit (30), the signals belonging to said satellite based television channels being also applied to said frequency filtering and translating unit (30), said selector (50) being connected to said bi-directional distribution facility (7) in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit (54) and to receive the signals belonging to said upstream data and/or voice channels from said bi-directional distribution facility (7) and to apply them to said peripheral node, said control logic unit (54) generating the control signals to be applied to said frequency filtering and translating unit (30) and a local downstream data sequence to be applied to the input of said combiner (48), said frequency filtering and translating unit (30) selecting

THIS PAGE BLANK (USPTO)

M 28.06.00

19 bis

the signals belonging to both said cable based television channels and
said satellite based television channels and frequency reallocating and/or
translating them for

THIS PAGE BLANK (USPTO)

M 28.08.00

22

13.- A system according to claim 12, characterized in that said digital modulation is a FSK and/or a PSK and/or QAM modulation.

5 14.- A system according to claim 12 or 13, characterized in that said user apparatus (9) further comprises a digital demodulator (59) arranged upstream of said logic unit (60), a frequency multiplexer (63) and a TELCO demodulator (64) for telecommunication services, arranged upstream of said user terminals (10, 11, 12), a TELCO modulator (65) for telecommunication services, arranged downstream of said user terminals (10, 11, 12), a digital modulator (68) which receives the television
10 channel selection data from at least one user terminal (11) as well as a combiner (69) arranged downstream of said TELCO modulator (65) and of said digital modulator (68) and upstream of said bi-directional distribution facility.

THIS PAGE BLANK (USPTO)

M 28.06.00

1/6

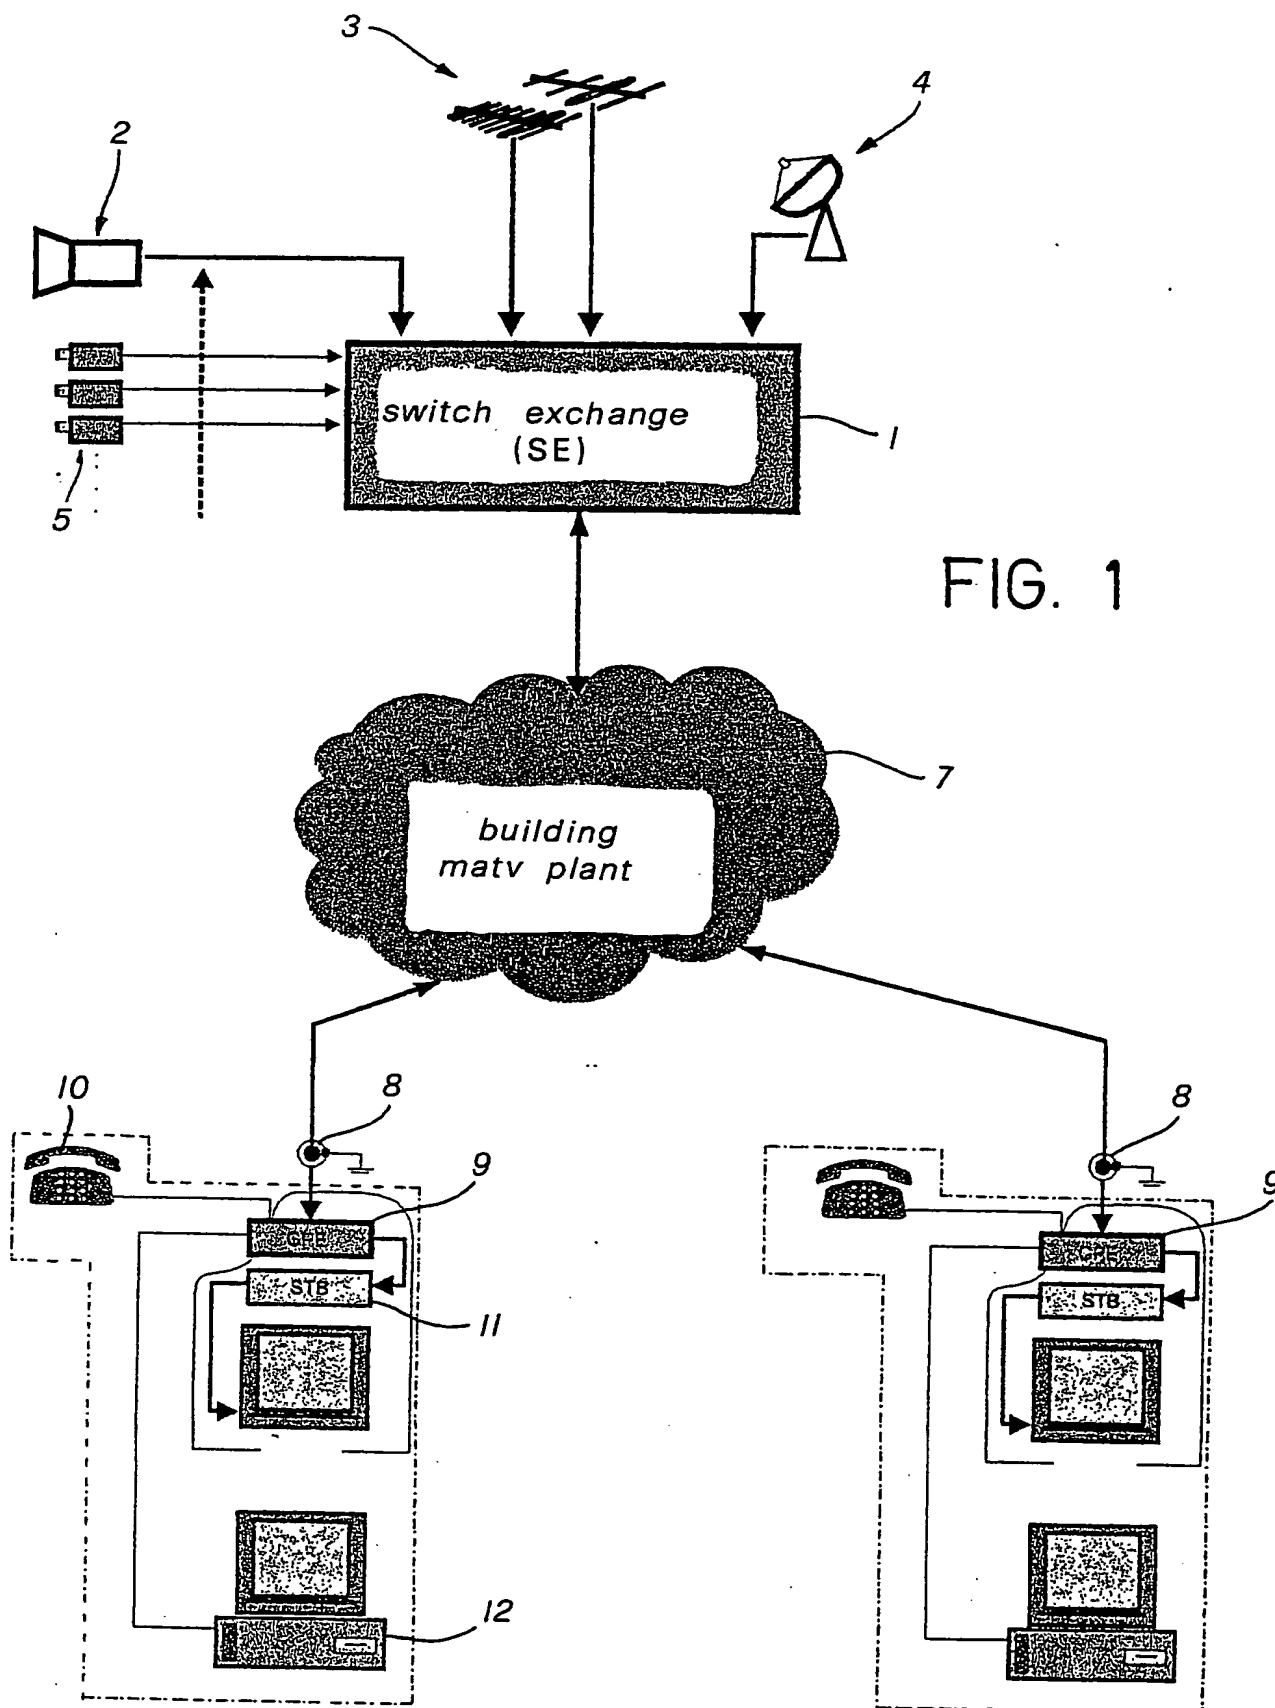


FIG. 1

THIS PAGE BLANK (USPTO)

OPTIMIZED SYSTEM FOR DISTRIBUTING TELEVISION AND
TELECOMMUNICATION SERVICES FROM A PERIPHERAL NODE TO
USER TERMINALS

5 This invention relates to an optimized system for distributing
television and telecommunication services from a peripheral node to user
terminals.

10 More particularly, this invention relates to a system of the
above mentioned kind that enables the already existing facilities designed
for centralized distribution of land based television channels, also known
as Master Antenna TV (MATV) to also be adapted, in economically
convenient and reliable way, to simultaneously distribute other television
and telecommunication services, also including the interactive services.

15 It is known that, in Italy as well as in many other countries,
hybrid telecommunication networks based upon coaxial cables and fibers,
also known as HFC (Hybrid Fiber-Coax) networks, are being presently
developed and largely utilized, to distribute many services, particularly
multi-medial services of interactive type.

20 Such HFC networks are based upon peripheral nodes to
distribute the signals to the individual user terminals connected thereto.
This is the case, for instance, of a building node connected by means of
suitable cables to the network in order to distribute the signals to the
users arranged throughout the building itself. In this respect, some
building nodes can be connected to the network, at least in so far the
television services are concerned, by means of a Microwave Video
25 Distribution Service, namely by means of so-called MVDS radio links.

The interactive telecommunication services include data and/or
voice return or upstream channels from the individual user terminals to
the concerned peripheral node, such as a building node, connected to
them and subsequently to the network.

30 Reference will be particularly made hereinafter to building
nodes considered as peripheral nodes, but it should be understood that
the system according to this invention can be applied to any peripheral
node.

35 The architectures of the facilities designed to distribute the
various services from a building node to the individual user terminals

THIS PAGE BLANK (USPTO)

unit, said selector being connected to said bi-directional distribution facility in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit and to receive the signals belonging to said upstream data and/or voice channels therefrom and to apply them to said peripheral node, said control logic unit generating the control signals to be applied to said frequency filtering and translating unit and a local downstream data sequence to be applied to the input of said combiner, said frequency filtering and translating unit selecting the input signals and frequency reallocating and/or translating them for applying them to the input of said combiner, said combiner mixing the input signals and applying them to said bi-directional distribution facility, said user apparatus including a demodulator, a logic unit, a modulator and a combiner, said logic unit processing said local downstream data sequence outcoming from said demodulator, said modulator modulating a local upstream data sequence related to said user apparatus, said combiner mixing the signals belonging to said local upstream data sequence as well as the signals belonging to upstream data and /or voice channels related to said user apparatus and applying them to said bi-directional distribution facility.

According to this invention, said exchange further comprises, upstream of said combiner, a unit for filtering the signals belonging to said land based television channels, which eliminates all replicated signals having the worst signal-to-noise ratio (SNR).

Still according to this invention, said television services further comprise television channels related to closed circuit television systems (CCTV) that are coupled to the input of said combiner or to said frequency filtering and translating unit.

Further according to this invention, said frequency filtering and translating unit comprises a converter unit for conversion of HFC radio frequencies, a converter unit for conversion of satellite based radio frequencies as well as a switch unit, said converter units having N inputs and N outputs, said switch unit having $2 \cdot N$ inputs and N outputs, the homologous outputs of both said converter units being alternatively selected by said switch unit and transferred to said frequency filtering and translating unit.

THIS PAGE BLANK (USPTO)

Upstream channel that is conveyed from said user apparatuses 9 to exchange 1 through said MATV facility 7 is transmitted by duplexer 49 to a selector 50 of local data. Said upstream channel is preferably allocated to frequency band extending from 5 to 30 MHz. Selector 50 separates all those signal corresponding to television channel selections performed by active STB terminals 11, which form a local upstream data sequence, from signals belonging to upstream data and/or voice channel corresponding to telecommunication services. The signals belonging to upstream data and /or voice channels of telecommunication services are then passed unaltered and are transmitted to said HFC network 2.

The above mentioned local upstream data sequence, after demodulation by demodulator 5, is conveyed through an input/output (I/O) interface to a logic control unit 54 aimed at controlling said exchange 1, which, by decoding them, provides for reading the address of the caller unit (identification of the STB terminal 11 formulating the request) as well as for construing the request. Based upon the requests, said logic unit 54 generates (if necessary) the control signals controlling said filtering and frequency translating unit 30 as well as the local downstream data sequence for controlling said STB terminal 11. Such local downstream data sequence, through said interface unit 53 and a modulator 55, preferably a binary frequency variation modulator (FSK = Frequency Shifting Keying), is coupled to the input of combiner 48 in order to be added to other signals by which the downstream channel of said exchange 1 is formed. Preferably, the carrier of said local downstream data sequence is at a frequency of 40 MHz.

By referring now to Figure 6, it can be observed that said local downstream data sequence generated by logic unit 54 is arranged so that any data 56 routed to each specific STB terminal 11 are preceded by an address 57 which identifies the STB terminal 11 which they are related to.

By referring to Figure 7, a user apparatus 9 connected to MATV facility 7 by means of a socket 8 comprises a first band pass filter 58 that transfers the signal belonging to the local downstream data sequence to a FSK demodulator 59. The resulting demodulated signal is then conveyed to a logic unit 60 that processes it, by decoding the local downstream data sequence, for recognition of the address 57 belonging to said STB terminal 11 and interpretation of the information content of the

THIS PAGE BLANK (USPTO)

CLAIMS

1.- An optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12), said television services including land based radio frequency broadcast television channels, satellite based radio frequency broadcast television channels and HFC network or cable based broadcast television channels, each of said telecommunication services including a downstream data and/or voice channel and an upstream data and/or voice channel, said system also including a bi-directional switch exchange (1) connected to said peripheral node, a facility (7) for bi-directional distribution of signals connected to said exchange (1) and at least a user apparatus (9) connected to said bi-directional facility (7) as well as to said user terminals (10, 11, 12), said exchange (1) comprising a filter (22), a frequency filtering and translating unit (30), a logic control unit (54), a combiner (48) and a selector (50), said combiner (48) and selector (50) being connected to said bi-directional distribution facility (7), the signals belonging to said land based television channels being applied to the input of said combiner (8), said filter (22) receiving the signals belonging to said cable based television channels and to said downstream data and/or voice channels, said filter (22) separating the signals belonging to said downstream data and/or voice channels from the signals belonging to said cable based television channels, said filter (22) also reallocating the signals belonging to said downstream data and/or voice channels to pre-established frequencies and applying them to the input of said combiner (48), said filter (22) also applying the signals belonging to said cable based television channels to said frequency filtering and translating unit (30), the signals belonging to said satellite based television channels being also applied to said frequency filtering and translating unit (30), said selector (50) being connected to said bi-directional distribution facility (7) in order to receive a local upstream data sequence therefrom and to apply it to said control logic unit (54) and to receive the signals belonging to said upstream data and/or voice channels therefrom and to apply them to said peripheral node, said control logic unit (54) generating the control signals to be applied to said frequency filtering and translating unit (30) and a local downstream data sequence to be applied to the input of said combiner (48), said frequency filtering and translating unit (30) selecting the input signals and frequency reallocating and/or translating them for


THIS PAGE BLANK (USPTO)

13.- A system according to claim 12, characterized in that said digital modulation is a FSK and/or a PSK and/or QAM modulation.

5 14.- A system according to claim 12 or 13, characterized in that said user apparatus (9) further comprises a digital demodulator (59) arranged upstream of said logic unit (60), a frequency multiplexer (63) and a TELCO demodulator (64) for telecommunication services, arranged upstream of said user terminals (10, 11, 12), a TELCO modulator (65) for telecommunication services, arranged downstream of said user terminals (10, 11, 12), a digital modulator (68) which receives the television
10 channel selection data from at least one user terminal (11) as well as a combiner (69) arranged downstream of said TELCO modulator (65) and of said digital modulator (68) and upstream of said bi-directional distribution facility.

15 15.- An optimized system for distribution of television and telecommunication services from a peripheral node to user terminals (10, 11, 12) according to any one of the preceding claims and substantially as illustrated and described.

THIS PAGE BLANK (USPTO)

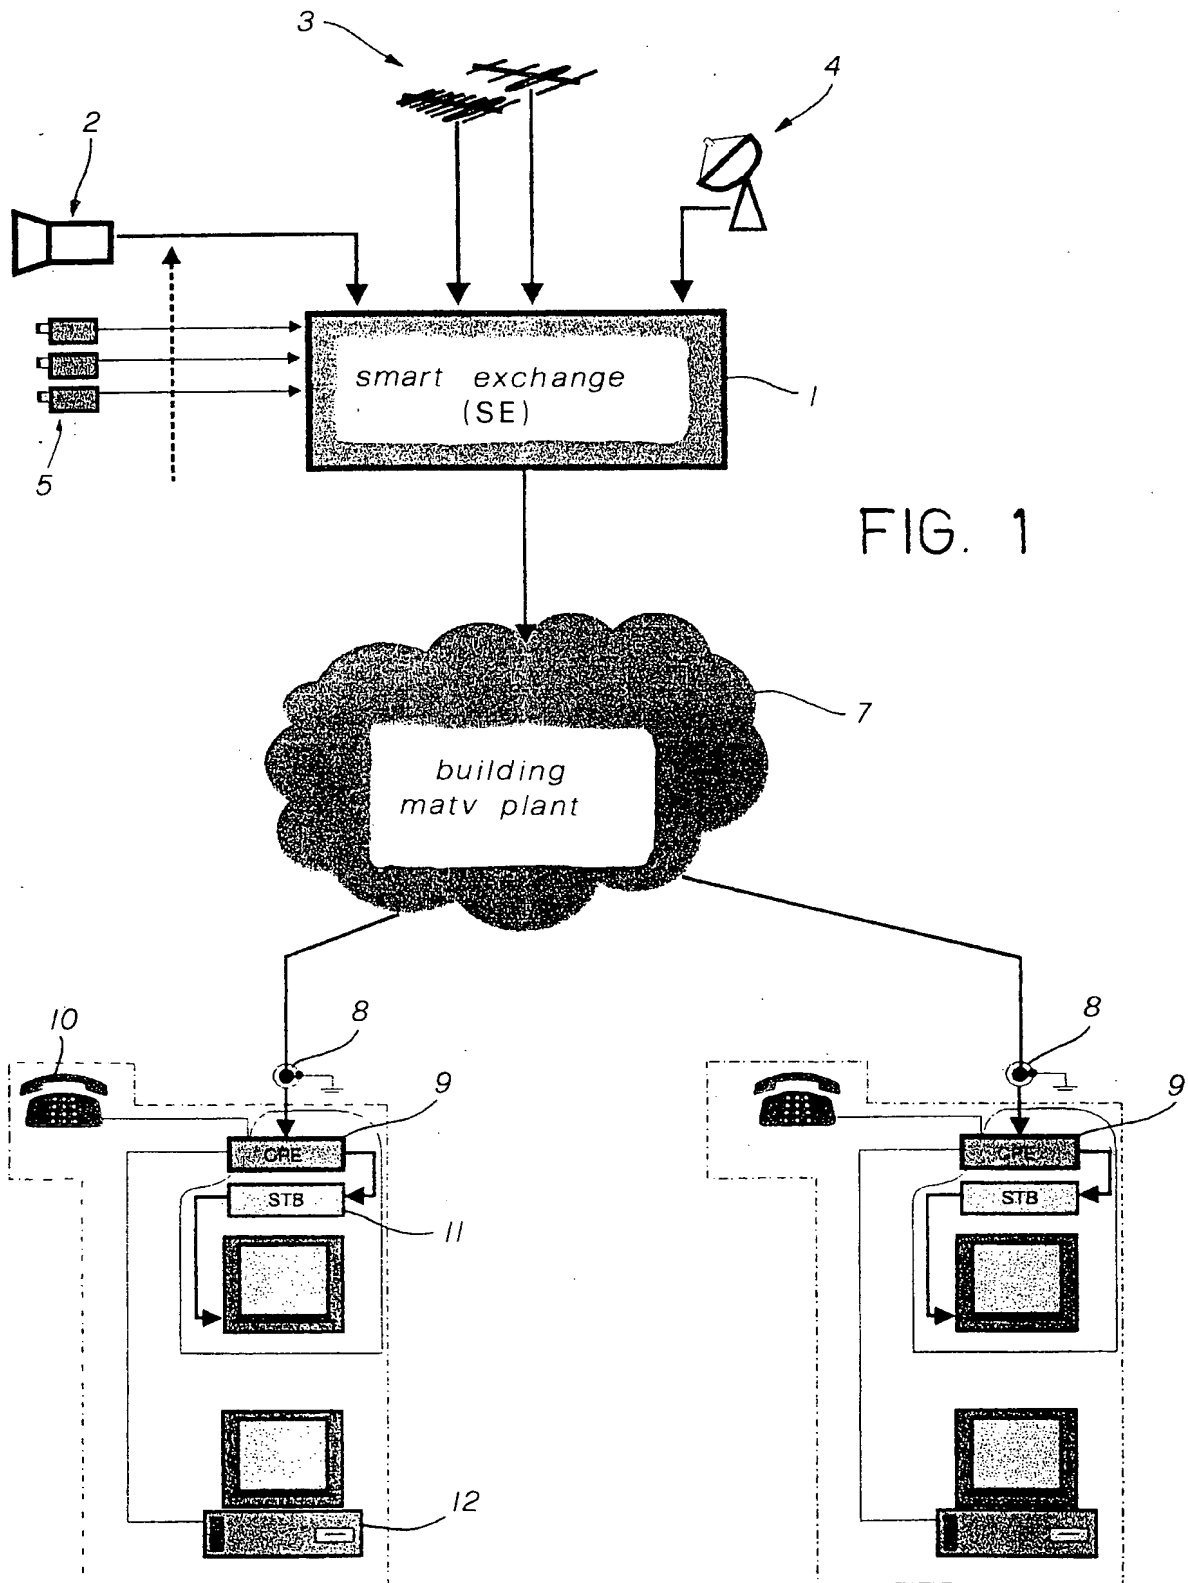

500 Rec'd PCT/PTO 1 6 JAN 2001

THIS PAGE BLANK (USPTO)